





SLY spot incasso


Questo apparecchio singolo viene installato con supporto a scomparsa a soffitto e permette di posizionare l'alimentazione a distanza dalla sorgente stessa.

This single appliance can be installed with stowed support on ceiling and allows setting the power supply unit far from the light source.

Dieses Einzelgerät wird mit Unterputzhalterung an der Decke installiert und erlaubt die Positionierung der Netzversorgung in Entfernung der Quelle selbst.


Esta luminaria independiente se instala con un soporte retráctil de techo y permite colocar la alimentación a distancia de la misma fuente.

Sistemi modulari
Modular systems
Modularsysteme
Sistemas modulares

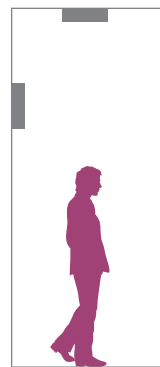


 70 mm

Accessori
Accessories
Zubehör
Accesorios




cod. A4BR3
Braccio rigido
Rigid arm
Fester Arm
Brazo rígido
300 mm







cod. A4FX3
Tubo flessibile
Flexible tube
Biegsamer Schlauch
Tubo flexible

300 mm

Solo per Sis2
Only for Sis2
Nur für Sis2
Solo para Sis2





| | cod. | Temperatura di colore Colour temperature Farbtemperatur Temperatura de color | Flusso luminoso Luminous flux Lichtstrom Flujo luminoso | Angolo di emissione Emission angle Emissionswinkel Ángulo de emisión | Potenza assorbita Absorbed power Leistungsaufnahme Potencia absorbida |
|---|--------------|---|--|---|--|
| Sis1  80 85 | A4YS01IB3L20 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 20° | 2,8 W |
| | A4YS01IB3L45 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 45° | 2,8 W |
| Sis2  80 87 | A4YS02IB3L20 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 20° | 2,8 W |
| | A4YS02IB3L45 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 45° | 2,8 W |
| Sis3  80 93 | A4YS03IB9L08 | BI 5.500 K W 3.000 K | 540 lm 450 lm | 8° | 8,4 W |
| | A4YS03IB9L20 | BI 5.500 K W 3.000 K | 540 lm 450 lm | 20° | 8,4 W |
| | A4YS03IB9L45 | BI 5.500 K W 3.000 K | 540 lm 450 lm | 45° | 8,4 W |
| Sis4  80 92 | A4YS04IB3L20 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 20° | 2,8 W |
| | A4YS04IB3L45 | BI 5.500 K W 3.000 K | 192 lm 144 lm | 45° | 2,8 W |

SLY spot incasso



Illuminamento
 Illuminance
 Beleuchten
 Iluminancia

Finitura
 Finishing
 Ausführung
 Acabado




Sistemi modulari
 Modular systems
 Modularesysteme
 Sistemas modulares





Trasparente
 Transparent
 Transparent
 Transparente



Trasparente
 Transparent
 Transparent
 Transparente



Trasparente
 Transparent
 Transparent
 Transparente



Trasparente
 Transparent
 Transparent
 Transparente