




Particolarmente adatto per applicazioni nelle controsoffittature di spazi espositivi, vetrine ed appartamenti, è il nuovo Mini Modo LED. Mini Modo LED è un faretto ad incasso completo di 3 LED nelle tonalità bianco caldo 3000K o bianco naturale 4000K con lenti da 15° o 40°. Struttura in lamiera con gruppo ottico orientabile fino ad un max di 30°; dissipatore in alluminio pressofuso. Grado di protezione IP20. Alimentabile a 350, 500 e 700 mA, alimentatore escluso.

Suitable for applications such in recessed ceilings of showrooms, windows and apartments is the new Mini Modo LED. Mini Modo LED is a recessed spot complete of 3 LED in warm 3000K and natural 4000K white tones with 15° or 40° lenses. The structure is in metal sheet with 30° adjustable optic group; heat sink in die-cast aluminum included, IP20. Powered at 350, 500 and 700 mA, driver excluded.

Le nouveau Mini Modo LED s'adapte particulièrement à des applications sur faux plafonds, en salles d'exposition, vitrines et appartements. Mini Modo LED est un appareil d'encastrement avec 3 LED teinte blanc chaud 3000K ou blanc naturel 4000K, angles 15° ou 40°. La structure est en tôle avec groupe optique réglable jusqu'à 30°; dissipateur en fonte d'aluminium. IP20. Alimentation à 350, 500 et 700 mA, driver exclu.

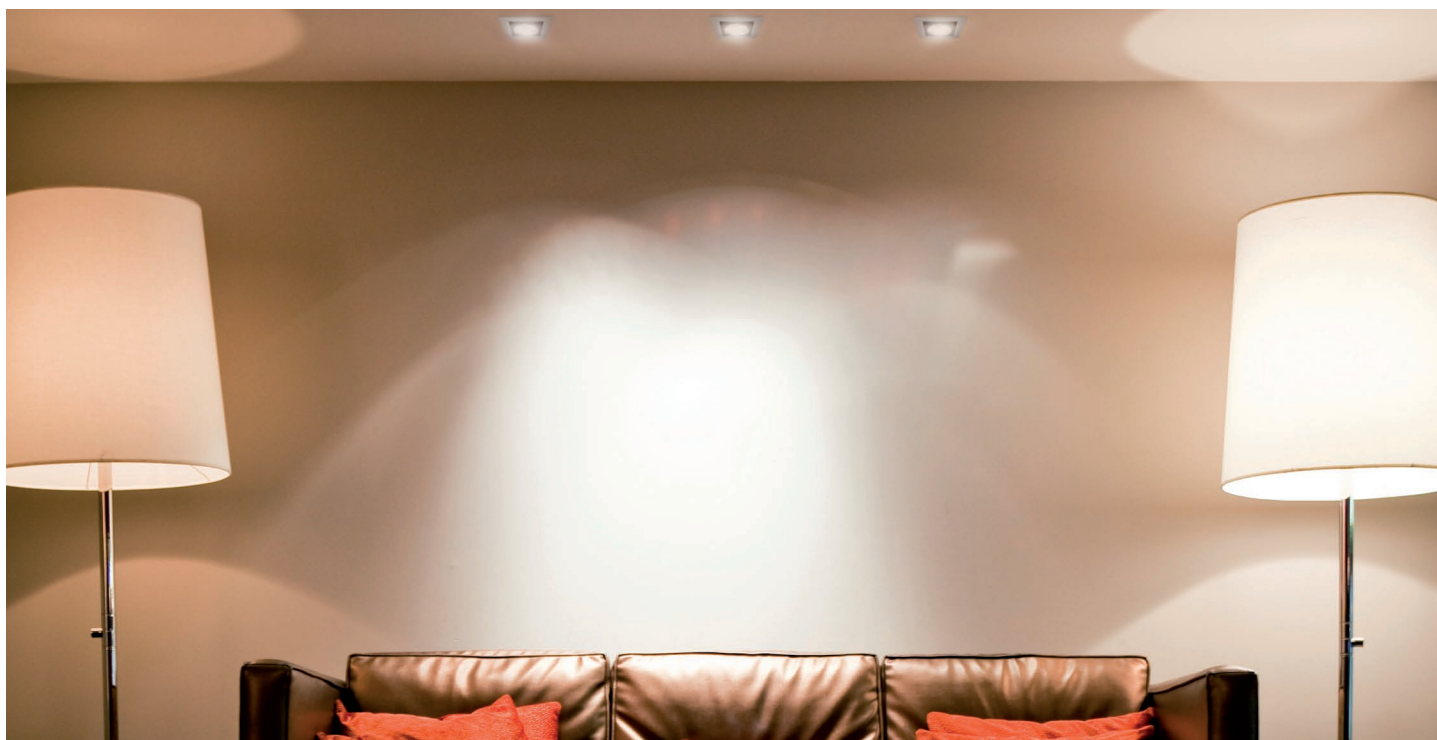










**JET.5250.157** 3 LEDx1,2W/2,4W 350/700mA

Versione quadrata con LED tono bianco naturale 4000K, lenti 40°.  
Version with square frame with LED natural white 4000K, 40° lens.  
Version avec cadre carré avec LED blanc naturel 4000K, lentilles 40°.


**JET.5250.158** 3 LEDx1,2W/2,4W 350/700mA

Versione quadrata con LED tono bianco caldo 3000K, lenti 40°.  
Version with square frame with LED warm white 3000K, 40° lens.  
Version avec cadre carré avec LED blanc chaud 3000K, lentilles 40°.

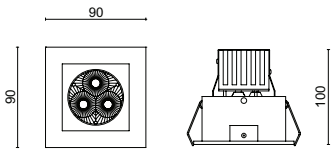


Driver forniti su richiesta come accessori.  
Drivers offered on demand as accessories.  
Driver fournis séparément comme accessoires.

Accessori / Accessories / Accessoires

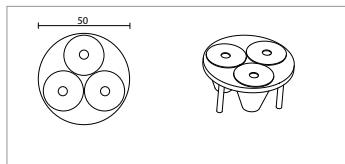


**LAA.5100.006**

Gruppo lenti a fascio medio (24°).  
Group medium beam lens (24°).  
Groupe lentilles intensive (24°).




**LAA.5100.007**

Gruppo lenti a fascio stretto (15°).  
Group narrow beam lens (15°).  
Groupe lentilles intensive (15°).

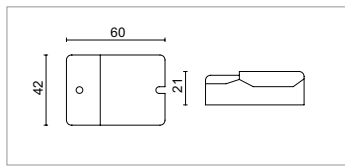


**AAA.TRSL01**

Driver per 1 apparecchio da 3 LED 350mA.  
Driver for 1 fitting for 3 LED 350mA.  
Driver pour 1 appareil de 3 LED 350mA.

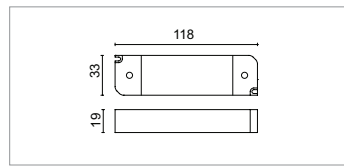


**AAA.TRSL31**

Driver per 1 apparecchio da 3 LED 700mA.  
Driver for 1 fitting for 3 LED 700mA.  
Driver pour 1 appareil de 3 LED 700mA.

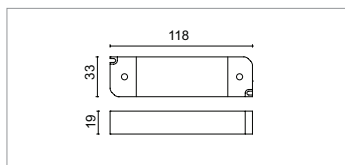

**AAA.TRSL05**

Driver per max 3 apparecchi da 3 LED 350mA.  
Driver for max 3 3 LED fittings 350mA.  
Driver pour max 3 appareils de 3 LED 350mA.

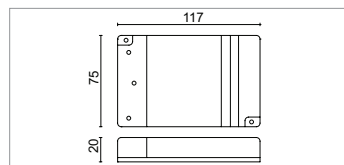

**AAA.TRSL35**

Driver per max 3 apparecchi da 3 LED 700mA.  
Driver for max 3 3 LED fittings 700mA.  
Driver pour max 3 appareils de 3 LED 700mA.

