



Water LED appartiene ad una serie di faretti da incasso in versione quadrata e circolare per interni ove sia richiesta una particolare protezione all'acqua ed alla polvere.

Water LED è disponibile nella versione a 3 LED nella tonalità bianco caldo a 3000K o bianco naturale 4000K con lenti da 15° o 40°. Struttura realizzata in alluminio pressofuso con ottica fissa e vetro di protezione temperato trasparente. Grado di protezione IP44. Dissipatore in alluminio pressofuso. Alimentabile a 350, 500 e 700 mA, alimentatore escluso.

Water LED belongs to the Water collection of recessed spots for indoor use, wherever a particular protection to the water and dust is required . Water LED is a recessed spot complete with 3 LED in warm 3000K and natural 4000K white tones with 15° or 40° lenses. The structure is in die-cast aluminum with fix optic and transparent tempered glass. Protection degree IP44. Heat sink in die-cast aluminum included. Powered at 350, 500 and 700mA, driver excluded.

Water LED appartient à une collection de spots encastrés en forme carré et ronde, pour l'installation à l'intérieur, surtout où il est exigée une protection particulier à l'eau et la poussière. Water LED est disponible en version 3 LED teinte blanc chaud à 3000K où blanc naturel à 4000K angle 15° ou 40°. La structure est en fonte d'aluminium avec optique fixe et verre de protection tempéré transparent. Degré de protection IP44. Dissipateur en fonte d'aluminium inclus. Alimentation à 350, 500 et 700 mA, driver exclu.




CE IP44

09



JER.5220.157 3 LEDx1,2W/2,4W 350/700mA

Versione rotonda con LED tono bianco naturale 4000K, lenti 40°.
Version with round frame with LED natural white 4000K, 40° lens.
Version avec cadre arrondi avec LED blanc naturel 4000K, lentilles 40°.

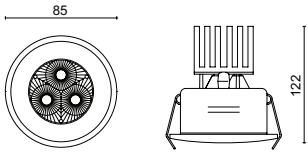

JER.5220.158 3 LEDx1,2W/2,4W 350/700mA

Versione rotonda con LED tono bianco caldo 3000K, lenti 40°.
Version with round frame with LED warm white 3000K, 40° lens.
Version avec cadre arrondi avec LED blanc chaud 3000K, lentilles 40°.

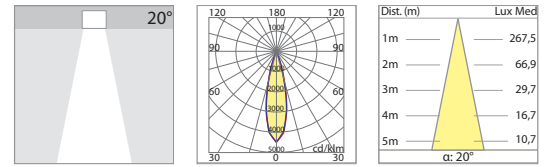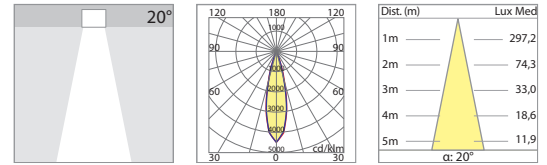


CE IP44

09



JER.5221.157 3 LEDx1,2W/2,4W 350/700mA

Versione quadrata con LED tono bianco naturale 4000K, lenti 40°.
Version with square frame with LED natural white 4000K, 40° lens.
Version avec cadre carré avec LED blanc naturel 4000K, lentilles 40°.

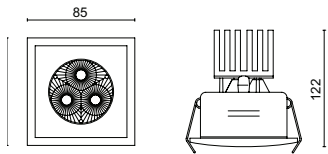


JER.5221.158 3 LEDx1,2W/2,4W 350/700mA

Versione quadrata con LED tono bianco caldo 3000K, lenti 40°.
Version with square frame with LED warm white 3000K, 40° lens.
Version avec cadre carré avec LED blanc chaud 3000K, lentilles 40°.

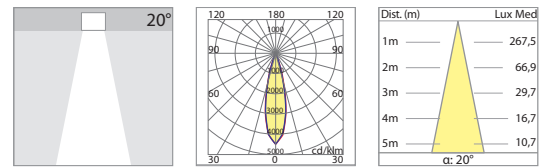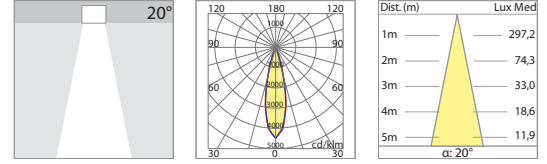


Driver forniti su richiesta come accessori.
Drivers offered on demand as accessories.
Driver fournis séparément comme accessoires.

Accessori / Accessories / Accessoires




LAA.5100.006 Gruppo lenti a fascio medio (24°).
Group medium beam lens (24°).
Groupe lentilles intensive (24°).




AAA.TRSL01

Driver per 1 apparecchio da 3 LED 350mA.
Driver for 1 fitting for 3 LED 350mA.
Driver pour 1 appareil de 3 LED 350mA.



AAA.TRSL05 Driver per max 3 apparecchi da 3 LED 350mA.
Driver for max 3 fittings 3 LED 350mA.
Driver pour max 3 appareils de 3 LED 350mA.



AAA.TRSL35

Driver per max 3 apparecchi da 3 LED 700mA.
Driver for max 3 fittings 3 LED 700mA.
Driver pour max 3 appareils de 3 LED 700mA.

AAA.TRSL31 Driver 350mA per 1 apparecchio da 3 LED 700mA.
Driver for 1 fitting for 3 LED 700mA.
Driver pour 1 appareil de 3 LED 700mA.

