


Laser Circular Low Profile Emergency

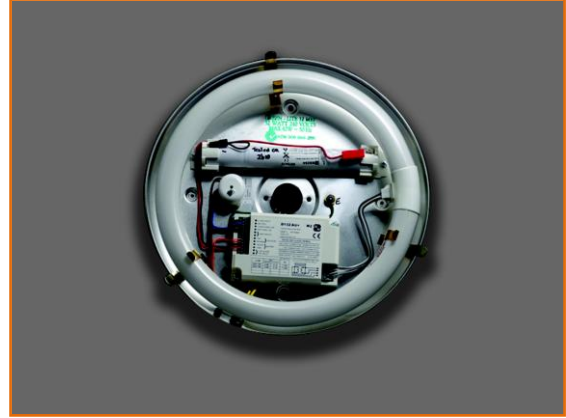

The new addition to the Circular Low Profile budget range of circular fluorescent light fittings. Circular Low Profile Maintained Emergency fitting encompassing all the great features of Circular Low Profile with the addition of Maintained Electronic Ballast with Ni-Cad Battery pack.

Standard features of all fittings include:

- Plexiglas® Opal acrylic diffuser which provides amazing light transmission, eliminates harsh shadows and glare. This material does not turn yellow or become brittle with age
- Sturdy aluminium deep base plate (22cm) specifically designed for easy connection to conduit box. The deep base plate houses the test switch and the charge indication LED
- Australian designed and manufactured
- UK designed and manufactured Maintained Electronic Ballast
- 4 C cell Ni-Cad battery pack
- Standard with T9 Tri-Phosphor tube 4000°K (Cool White)
- Unique design spring steel clips for positive attachment of tube and diffuser. Strong and durable and designed to last the life of the fitting
- Wired to Australian Standards with V105°C cable

Suggested applications for Circular Low Profile Range:


- Commercial premises such as offices, stairwells, carparks, units, nursing homes, hospitals, kitchens, workshops and food outlets
- Public space, stairwells and passageways
- Same diffuser as standard Circular Low Profile range which allows a uniform look when in a hallway or stairwell situation on a commercial premises

To clearly differentiate this product, the following features should be nominated in your specification:

Laser Circular Low Profile Emergency with:

- Sturdy aluminium base plate
- Blow moulded cast acrylic diffuser
- Spring steel clips for mounting diffuser
- Tri-Phosphor fluorescent tube included
- Quick mounting direct to conduit box
- One piece electronic ballast/inverter
- 4 x C cell Ni-Cad battery pack
- Wired to Australian standards with V105°C cable

CFL132MEPNE

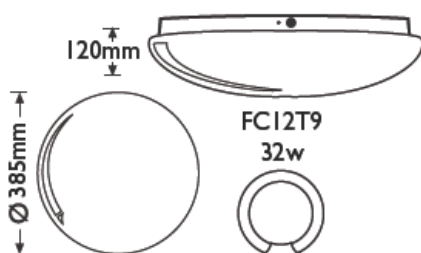

Tri-Phosphor Circular tubes
4000°K Cool White

Complies with EMC framework



Options/Variations Available

Base Plate: White Powder coat

Tube Type: 5000°K HI-FI/3000°K Twi-Lite

Diffuser: Satin Marble decorative finish