

## Laser Circular Low Profile SLIM Range



The newest addition to the Circular Low Profile budget range of circular fluorescent light fittings. Encompassing all the great features of the Circular Low Profile with the latest technology T5 tubing and Electronic Ballast with an amazing low profile Acrylic Diffuser.

### Standard features of all fittings include:

- Plexiglas® Opal acrylic diffuser which provides amazing light transmission, eliminates harsh shadows and glare. This material does not turn yellow or become brittle with age
- The latest low profile design – only 80mm deep on the CFLS40
- Sturdy aluminium base plate won't discolour or distort with heat
- Unique design spring steel clips for positive attachment of tube and diffuser. Strong and durable and designed to last the life of the fitting
- CFL Slim is standard with Tri-Phosphor T5 tubing in 5000°K (Hi-Fi) using European style connection (2GX13)
- 'Quick Connect' terminal block – 3 pole including earth (saving installation time)
- Australian designed and manufactured
- Wired to Australian Standards with V105°C cable
- Electronic ballasts

### Suggested applications for CFL Slim Range:


- Commercial premises such as offices, consulting rooms, professional suites, units, nursing homes, hospitals, kitchens, workshops and food outlets
- Domestic applications such as living rooms, kitchens, laundries, toilets, bathrooms, ensuites, hallways, studies and garages
- Public space and passageways
- Can be grouped as an alternative to strip fluorescent lighting in commercial or domestic applications
- Illuminated signs for advertising and displays
- Any area where a low profile is required

### To clearly differentiate this product, the following features should be nominated in your specification:


Laser CFL Slim with:

- Sturdy aluminium base plate
- Blow moulded cast acrylic diffuser
- Spring steel clips for mounting diffuser
- Tri-Phosphor fluorescent tube included
- Quick connect terminal block
- Wired to Australian standards with V105°C cable


**CFLS22**

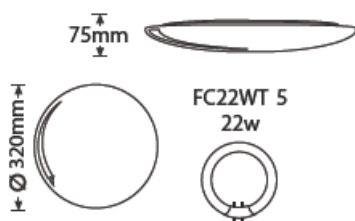

**CFLS40**

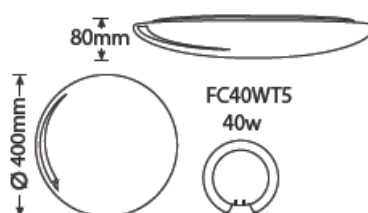

**CFLS62**

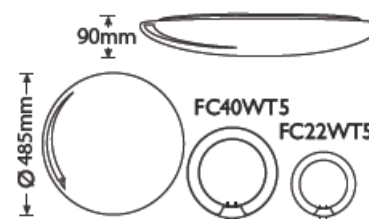

Tri-Phosphor Circular tubes  
3000°K Twi-Lite  
4000°K Cool White (Osram only)  
5000°K Hi-Fi  
Complies with EMC Framework



**Options/Variations Available**  
Electronic Ballast: Osram Quicktronic  
Tube Type: Osram T5  
Tube Colour: 3000°K Twi-Lite / 4000°K Cool White  
Dimmable  
Ballast: Tridonic T5c ECO  
Dall Dimmable  
Ballast: Tridonic T5c EXCEL One4all  
Diffuser: Matt Finish



Circular Low Profile Slim



Circular Low Profile Slim