

Laser Circular Low Profile Range



The Circular Low Profile

circular fluorescent light fittings that are suitable for domestic or commercial applications. Designed and manufactured in Australia from quality materials, the Circular Low Profile is the first choice where initial cost and economy of operation are the main consideration. Circular Low Profile is the benchmark for all budget circular fluorescent light fittings.

Range offers four budget

Standard features of all fittings include:

- Plexiglas® Opal acrylic diffuser which provides amazing light transmission, eliminates harsh shadows and glare. This material does not turn yellow or become brittle with age
- Unique spring steel clips are strong and durable and designed to last the life of the fitting
- Modern Low profile design is unobtrusive and aesthetically pleasing
- Sturdy aluminium base plate won't discolour or distort with heat
- Australian designed and manufactured
- Wired to Australian Standards with V105°C cable

Optional Diffuser Styles:

- SATIN MARBLE decorative diffuser uses a high transmitting opal acrylic. Available for all versions
- All Satin Marble versions come fitted with a Tri-Phosphor 5000°K (Hi-Fi) tube

Circular Low Profile is also available with a 9W PL lamp for use as a night light (individually switched). Ideal for aged care facilities


Suggested applications for Circular Low Profile Range:

- Commercial premises such as offices, consulting rooms, professional suites, units, nursing homes, hospitals, kitchens, workshops and food outlets
- Domestic applications such as living rooms, kitchens, laundries, toilets, bathrooms, hallways, studies and garages
- Public space and passageways
- Can be grouped as an alternative to strip fluorescent lighting in commercial or domestic applications
- Wardrobes, en-suites, hallways and under eaves
- Illuminated signs for advertising and displays

To clearly differentiate this product, the following features should be nominated in your specification:

Laser Circular Low Profile with:

- Sturdy aluminium base plate
- Blow moulded cast acrylic diffuser
- Spring steel clips for mounting diffuser
- Cool White Circular fluorescent tube included
- Wired to Australian standards with V105°C cable

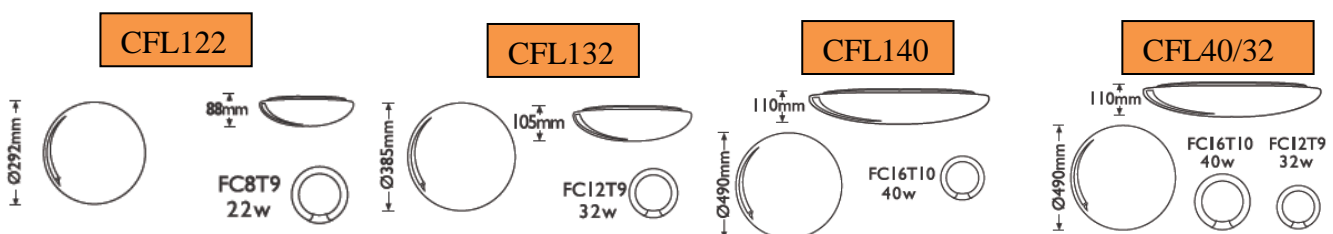

Tri-Phosphor Circular Tubes
3000°K Twi-Lite
4000°K Cool White
5000°K Hi-Fi

Complies with EMC Framework



OPTIONS

- Matt Finish Diffuser
- Satin Marble decorative diffuser available
- Circular tubes- Tri-phosphor either as 5000°K Hi-Fi or 3000°K Twi-Lite for superior performance
- High Power Factor (HPF) corrected to 0.9
- Electronic Pulse Starter (EST) for flicker free starting and extended tube life
- Low Loss Ballast (LLB) for cooler operation and lower power usage. GL22, GL32, GL40. Standard with GL40/32.
- Fused Terminal Block (FTB) for convenient lamp removal protection
- Electronic Ballast (EB) not for 40/32



Circular Low Profile Range