

The Circular Low Profile range offers four budget circular fluorescent light fittings that are suitable for domestic or commercial applications. Designed and manufactured in Australia, from quality materials, the Circular Low Profile is the first choice where initial cost and economy of operation are the main consideration. The Circular Low Profile is the benchmark for all budget circular fluorescent light fittings.



**Standard features of all fittings include;**

- Modern low profile design which is unobtrusive and aesthetically pleasing.
- Cast acrylic diffuser transmits a high level of light, eliminates harsh shadows and glare and won't yellow with age.
- Sturdy aluminium base plate won't distort with heat or discolour.
- unique spring steel clips are strong and durable and designed to last the life of the fitting.
- Cool White and Tri-phosphor tubing available.
- Wired to Australian Standards with V105°C cable.
- Australian design and manufacture

**Suggested Applications for the Circular Low Profile Range**

- Commercial premises such as offices, consulting rooms, professional suites, units, nursing homes, hospitals, kitchens, workshops and food outlets.
- Domestic applications such as living rooms, kitchens, laundries, toilets, bathrooms, hallways, studies and garages.
- Can be grouped as an alternative for strip fluorescent lighting in commercial or domestic applications.
- Public Space and Passageways.
- Wardrobes, en-suites, hallways, under eaves.
- Illuminated signs for advertising and display.

**To clearly differentiate this product, The following features should be nominated in your specification;**

**Circular Low Profile with;**


- Sturdy aluminium base plate.
- Australian manufactured and designed.
- Blow moulded cast acrylic diffuser.
- Spring steel clips for mounting diffuser.
- Cool White circular fluorescent tube included.
- Wired to Australian Standards with V105°C cable.

**Optional Diffuser Styles**


**STARBURST** and **SATIN MARBLE** decorative diffuser uses a high light transmitting opal acrylic. Available for 22W, 32W and 40W versions.

All STARBURST versions come fitted with a Tri-Phosphor 5000°K (Hi-Fi) tube.


**CFL122**

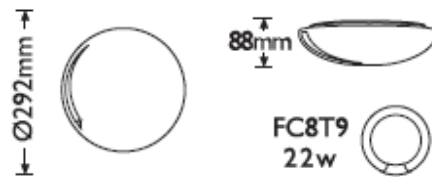


**CFL132**

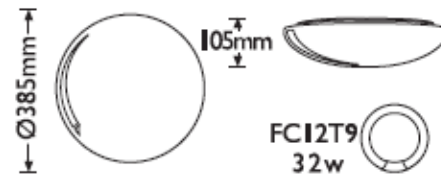

**CFL140**

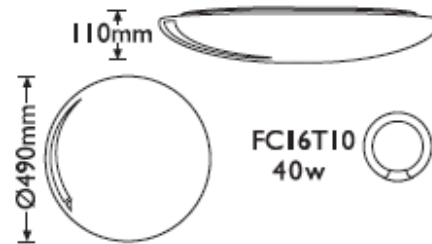

**CFL 40/32**

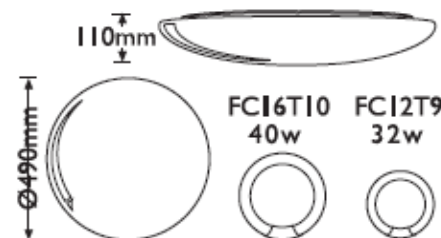

Circular Tubes - Single Phosphor, 4200°K (Cool White)

Complies with EMC Framework

**OPTIONS**

- **Starburst decorative diffuser available**
- **Circular tubes**-Tri-phosphor either as 5000°K Hi-Fi or 3000°K Twi-Lite for superior performance
- **Maintained Emergency Pack (MEP)** - available for 22W, 32W and 40W fittings
- **High Power Factor (HPF)** corrected to 0.9
- **Electronic Pulse Starter (EST)** for flicker free starting and extended tube life
- **Low Loss Ballast (LLB)** for cooler operation and lower power usage. GL22, GL32, GL40. Standard with GL40/32.
- **Fused Terminal Block (FTB)** for convenient lamp removal protection