
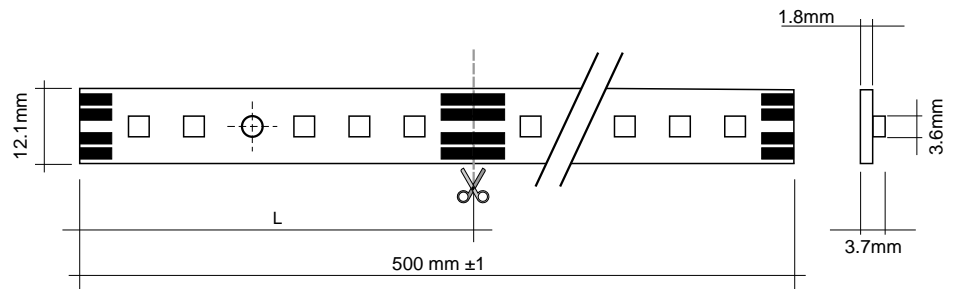


5.7 - C2 Bar RGB24VDC Powered LEDTECH 5X5

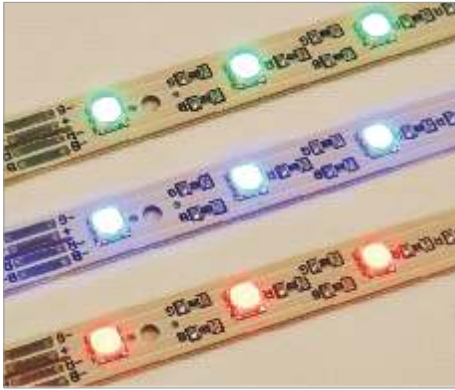

Applications:


- Impressive lighting
- Rays of light
- Backlighting

Features:

- Supply RGB24VDC
- Support made of kapton
- Bi-adhesive 3M
- Copper circuit 35μ
- Circuit dimensions 500x12mm
- Identification of polarity
- Connections by connection boards to weld
- Emission angle 120°
- Separable every 5 LED

Notes:

- Weight 15g
- Dimensions: 12.1x500mm
- compatible with aluminium/PC profiles
- Tc -10 +60°C
- Ta -30 +80°C



CODE	LED model	Nr of LED	Power (W)	L (separable every)	Supply again every
5LR10RGLDT	Ledtech RGB 5x5	10LED	6.0 W	25.0 cm	15 m
5LR20RGLDT	Ledtech RGB 5x5	20LED	10.8 W	12.5 cm	6 m
5LR25RGLDT	Ledtech RGB 5x5	25LED	13.5 W	10.0 cm	5 m