


3.7 C2 Bar powered ledtech 5x5

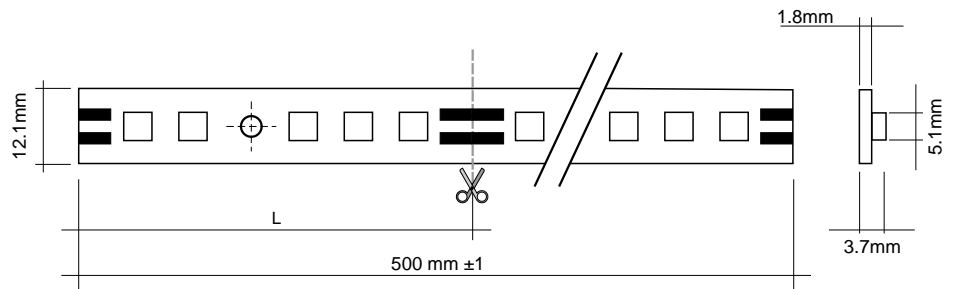

Applications:


- Impressive lighting
- Rays of light
- Backlight

Features:

- Supply 24VDC
- Fibreglass base 1,6mm
- PCB-FR4 printed circuit
- Identification of polarity
- Connections by pitches to weld
- Emission angle 120°
- separable every 5 LED
- Hole for fixing each 5 LED

Notes:

- Weight 20g
- Dimensions: 500x12.1mm
- Compatible with aluminium/PC
- Tc -10 +60°C
- Ta -30 +80°C



CODE	LED model	Colour	Nr. of LED	Power (W)	(Lumen)	L (separable every)	Supply again every
3200°k							
5LR10WKLD	Ledtech SMD 5x5	warm white	10	3.5 W	80 lm	250 mm	15 m
5LR20WKLD	Ledtech SMD 5x5	warm white	20	7.0 W	160 lm	125 mm	12 m
5LR25WKLD	Ledtech SMD 5x5	warm white	25	8.0 W	200 lm	100 mm	10 m
4200°k							
5LR10WKFLD	Ledtech SMD 5x5	natural white	10	3.5 W	80 lm	250 mm	15 m
5LR20WKFLD	Ledtech SMD 5x5	natural white	20	7.0 W	160 lm	125 mm	12 m
5LR25WKFLD	Ledtech SMD 5x5	natural white	25	8.0 W	200 lm	100 mm	10 m
5800°k							
5LR10WLDT	Ledtech SMD 5x5	cold white	10	3.5 W	90 lm	250 mm	15 m
5LR20WLDT	Ledtech SMD 5x5	cold white	20	7.0 W	180 lm	125 mm	12 m
5LR25WLDT	Ledtech SMD 5x5	cold white	25	8.0 W	225 lm	100 mm	10 m

