


## 3.8 C2 Strip powered Ledtech 5x5

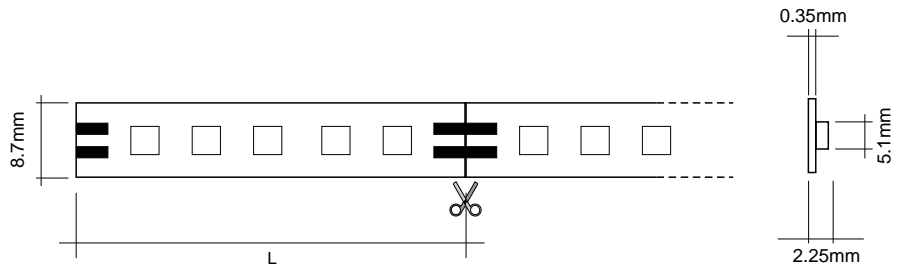

### Applications:


- Safety lighting
- Impressive lighting
- Rays of light
- Backlight

### Features:

- Supply 24VDC
- Support made of kapton
- 3M bi-adhesive
- Circuit made of copper 35µ
- Identification of polarity
- Connections by pitches to weld
- Emission angle 120°
- Separable every 5 LED

### Notes:

- Weight 20g/m
- Dimensions: 8.7 mm
- Compatible with aluminium/PVC
- Tc -10 +60°C
- Ta -30 +80°C



| CODE          | LED model       | Colour        | Nr. of LED | Power (W) | (Lumen) | L (separable every) | Supply again every |
|---------------|-----------------|---------------|------------|-----------|---------|---------------------|--------------------|
| <b>3200°k</b> |                 |               |            |           |         |                     |                    |
| 5LF20WKLD     | Ledtech SMD 5x5 | warm white    | 20LED/m    | 10.0 W/m  | 16 lm/m | 250 mm              | 12 m               |
| 5LF30WKLD     | Ledtech SMD 5x5 | warm white    | 30LED/m    | 14.0 W/m  | 24 lm/m | 166 mm              | 9 m                |
| 5LF40WKLD     | Ledtech SMD 5x5 | warm white    | 40LED/m    | 20.0 W/m  | 32 lm/m | 125 mm              | 6 m                |
| 5LF50WKLD     | Ledtech SMD 5x5 | warm white    | 50LED/m    | 25.0 W/m  | 40 lm/m | 100 mm              | 3 m                |
| <b>4200°k</b> |                 |               |            |           |         |                     |                    |
| 5LF20WKFLD    | Ledtech SMD 5x5 | natural white | 20LED/m    | 10.0 W/m  | 16 lm/m | 250 mm              | 12 m               |
| 5LF30WKFLD    | Ledtech SMD 5x5 | natural white | 30LED/m    | 14.0 W/m  | 24 lm/m | 166 mm              | 9 m                |
| 5LF40WKFLD    | Ledtech SMD 5x5 | natural white | 40LED/m    | 20.0 W/m  | 32 lm/m | 125 mm              | 6 m                |
| 5LF50WKFLD    | Ledtech SMD 5x5 | natural white | 50LED/m    | 25.0 W/m  | 40 lm/m | 100 mm              | 3 m                |
| <b>5800°k</b> |                 |               |            |           |         |                     |                    |
| 5LF20WLDT     | Ledtech SMD 5x5 | cold white    | 20LED/m    | 10.0 W/m  | 18 lm/m | 250 mm              | 12 m               |
| 5LF30WLDT     | Ledtech SMD 5x5 | cold white    | 30LED/m    | 14.0 W/m  | 27 lm/m | 166 mm              | 9 m                |
| 5LF40WLDT     | Ledtech SMD 5x5 | cold white    | 40LED/m    | 20.0 W/m  | 36 lm/m | 125 mm              | 6 m                |
| 5LF50WLDT     | Ledtech SMD 5x5 | cold white    | 50LED/m    | 25.0 W/m  | 45 lm/m | 100 mm              | 3 m                |

