


3.12 Powerbar480 L12

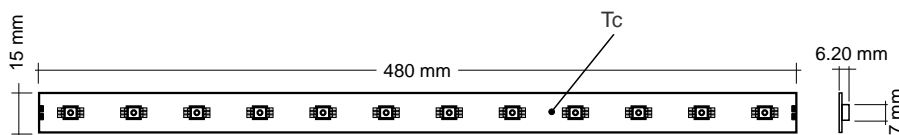

Applications:

- Impressive lighting
- Powerful lighting
- Replacement of fluorescent lamps

Features:


- Supply 24VDC
- Metal-core circuit
- Identification of polarity
- Connections by pitches to weld
- Emission angle 120°

Notes:

- Weight 42g
- dimensions: 20.5x480mm
- The product needs a dissipator
- Compatible with aluminium profiles
- Tc -10 +60°C
- Ta -30 +80°C

CODE	LED model	Colour	Nr. of LED	Power (W)	(Lumen)
GD-12WKOSR-BAR	Osram	warm white 3200°k	12 LED	17 W	600 lm
GD-12WKFOSR-BAR	Osram	natural white 4200°k	12 LED	17 W	700 lm
GD-12WOSR-BAR	Osram	cold white 5800°k	12 LED	17 W	720 lm
GD-12WKCRE-BAR	Cree XRE	warm white 3200°k	12 LED	17W	720 lm
GD-12WKFCRE-BAR	Cree XRE	natural white 4200°k	12 LED	17W	800 lm
GD-12WCRE-BAR	Cree XRE	cold white 5800°k	12 LED	17W	960 lm
GD-12WKCRE-BAR2	Cree XRE	warm white 3200°k	12 LED	24 W	720 lm
GD-12WKFCRE-BAR2	Cree XRE	natural white 4200°k	12 LED	24 W	800 lm
GD-12WCRE-BAR2	Cree XRE	cold white 5800°k	12 LED	24 W	960 lm
GD-12GCRE-BAR	Cree XRE	green	12 LED	17 W	640 lm
GD-12BCRE-BAR	Cree XRE	blue	12 LED	17 W	400 lm
GD-12RCRE-BAR	Cree XRE	red	12 LED	17 W	480 lm

8.4 - PROFILE AL 4056

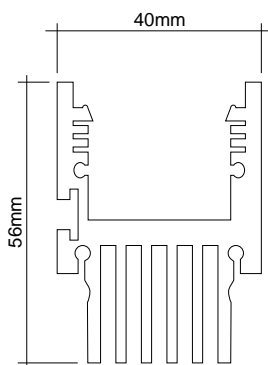

Applications:

- Support strip e bar LED Powerbar

Features:


- Extruded aluminium profile

Notes:

- Weight 2.1kg/m
- Dimensions: 40X56X4020mm

CODE	Description
PRODIS-40X56	Profile 40X56 Length standard 4.02m

8.5 - PROFILE AL 3035

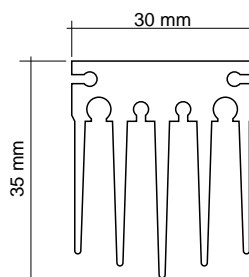

Applications:

- Support strip e bar LED Powerbar

Features:

- Extruded aluminium profile

Notes:

- Weight 1.12kg/m
- Dimensions: 30X35X2010mm

CODE	Description
DIS-BAR-24	Profile 30X35 Length standard 2.01m