



SINGLE COLOUR



RGB COLOUR

TECHNICAL SPECIFICATIONS

- RATING:** IP68
FINISH: Anodised or gloss powdercoated aluminium
LED's: 100,000 Hours MTBF (dependant upon installation environment) LED's
LED TYPE: PowerLED Surface Mount, 120° beam
RESIN FILL: Thermal heat resin to base of LED's, opaque resin to top
LED COLOUR: RGB or Green (G) White (W) Blue (B) Yellow (Y) Amber (A) Red (R) Warm White (WW)
LED SPACING: RGB - Cluster Single Colour - 12.5mm (012) 25mm (025)
CHANNEL TYPE: 20 x 20 Channel (2020C) 20 x 20 Angle (2020A)
CHANNEL COLOUR: Black powdercoat (BP) Custom powdercoat (CP) Black anodised (BA) Natural anodised (NA)
WATTAGE: 0.3 watts per 3 LED's @ 12v D.C.
WIRING: Pre wired with 1mtr cable. Feed tail position must be specified at time of order
MOUNTING: Dependant upon application. Contact **hawko** for more details

SPECIFICATION CODE:
HLN – (LED Colour) - (LED Spacing) – (Channel Type) – (Channel Colour)


PLEASE NOTE This fitting is a highly durable, shockproof, maintenance free **hawko** product

DIMENSIONS


- HEIGHT:** 20mm
WIDTH: 20mm

APPLICATIONS

- Foyers – Building Outlines
- Glass Work – Signage
- Pelmet
- Display Walls
- Water Features

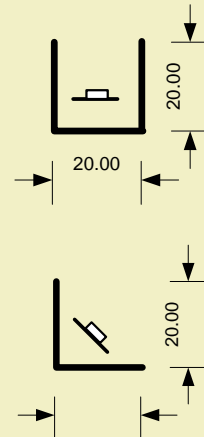

*all measurements are in millimetres

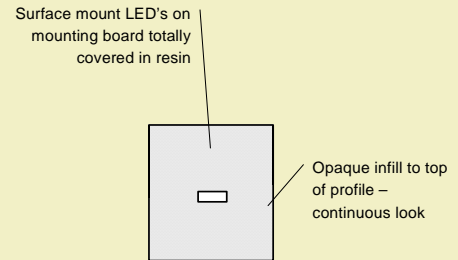

CONSTRUCTION MATERIAL

Aluminium extrusion



Larger cable sizes than normal are required to connect extra low voltage lighting. This fitting must be installed in a serviceable location and the correct maintenance and installation must be carried out to ensure the longevity of all product. Specification may change without notice and this fitting is sold subject to conditions of sale and terms of delivery. E.& O.E.