



Venere




Venere


Indoor hidden products for false ceiling application. Round shape, available with white led or RGB.







Materials

Aluminium.
Seoul Led.

Accordingly to the specification CEI EN 60598-1 (CEI 34-21); CEI EN 60598-2-2 (CEI 34-31), CEI EN 62031 (34-118), CEI EN 62471 (76-9).

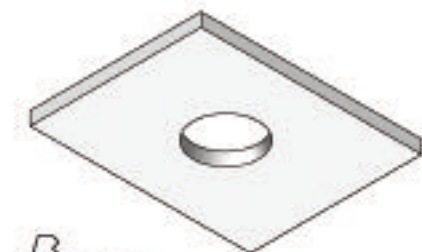

 Ø 74 mm

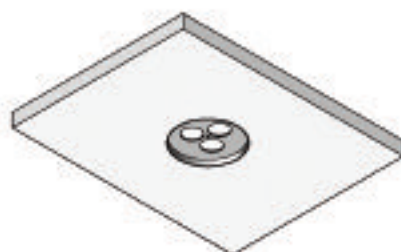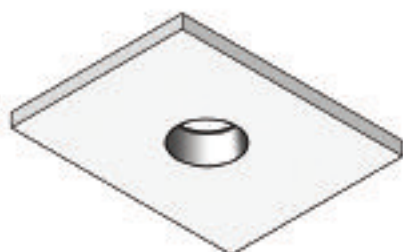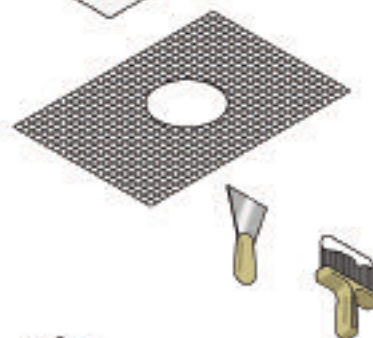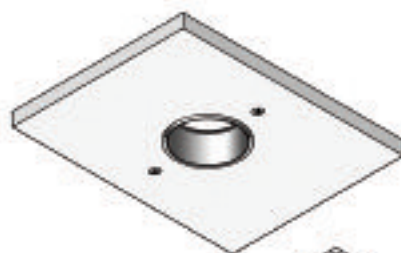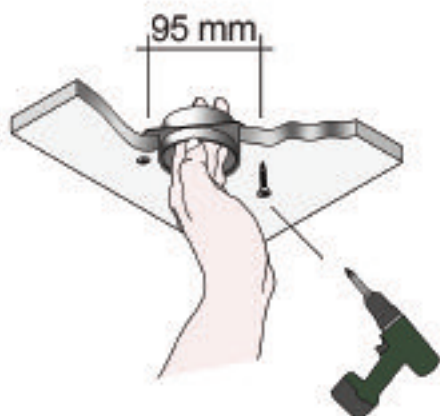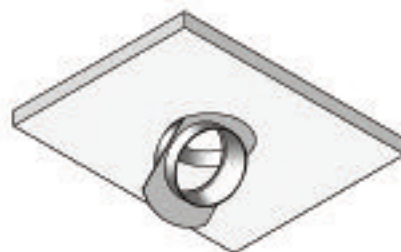

S808X3003AI



Code	Lamps Watt	Light beam	3000 K
S808X3003 AI•BI	3x3	10°	
S808X3003 AU•BU	3x3	25°	




pag. 464

Recessed LED projector for indoor.

Body and recessed ring: natural anodized or white painted aluminium.
PMMA Lens.


Line entry: PVC HT 105° 3x0,5 mmq cable L=30 cm (dimnable with separate remote unit).

Voltage: 24Vdc ballast has to be ordered separately (not included).

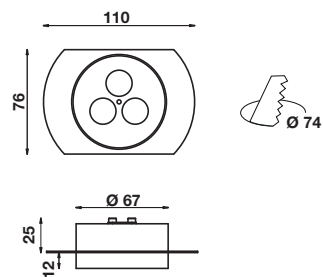

Colours



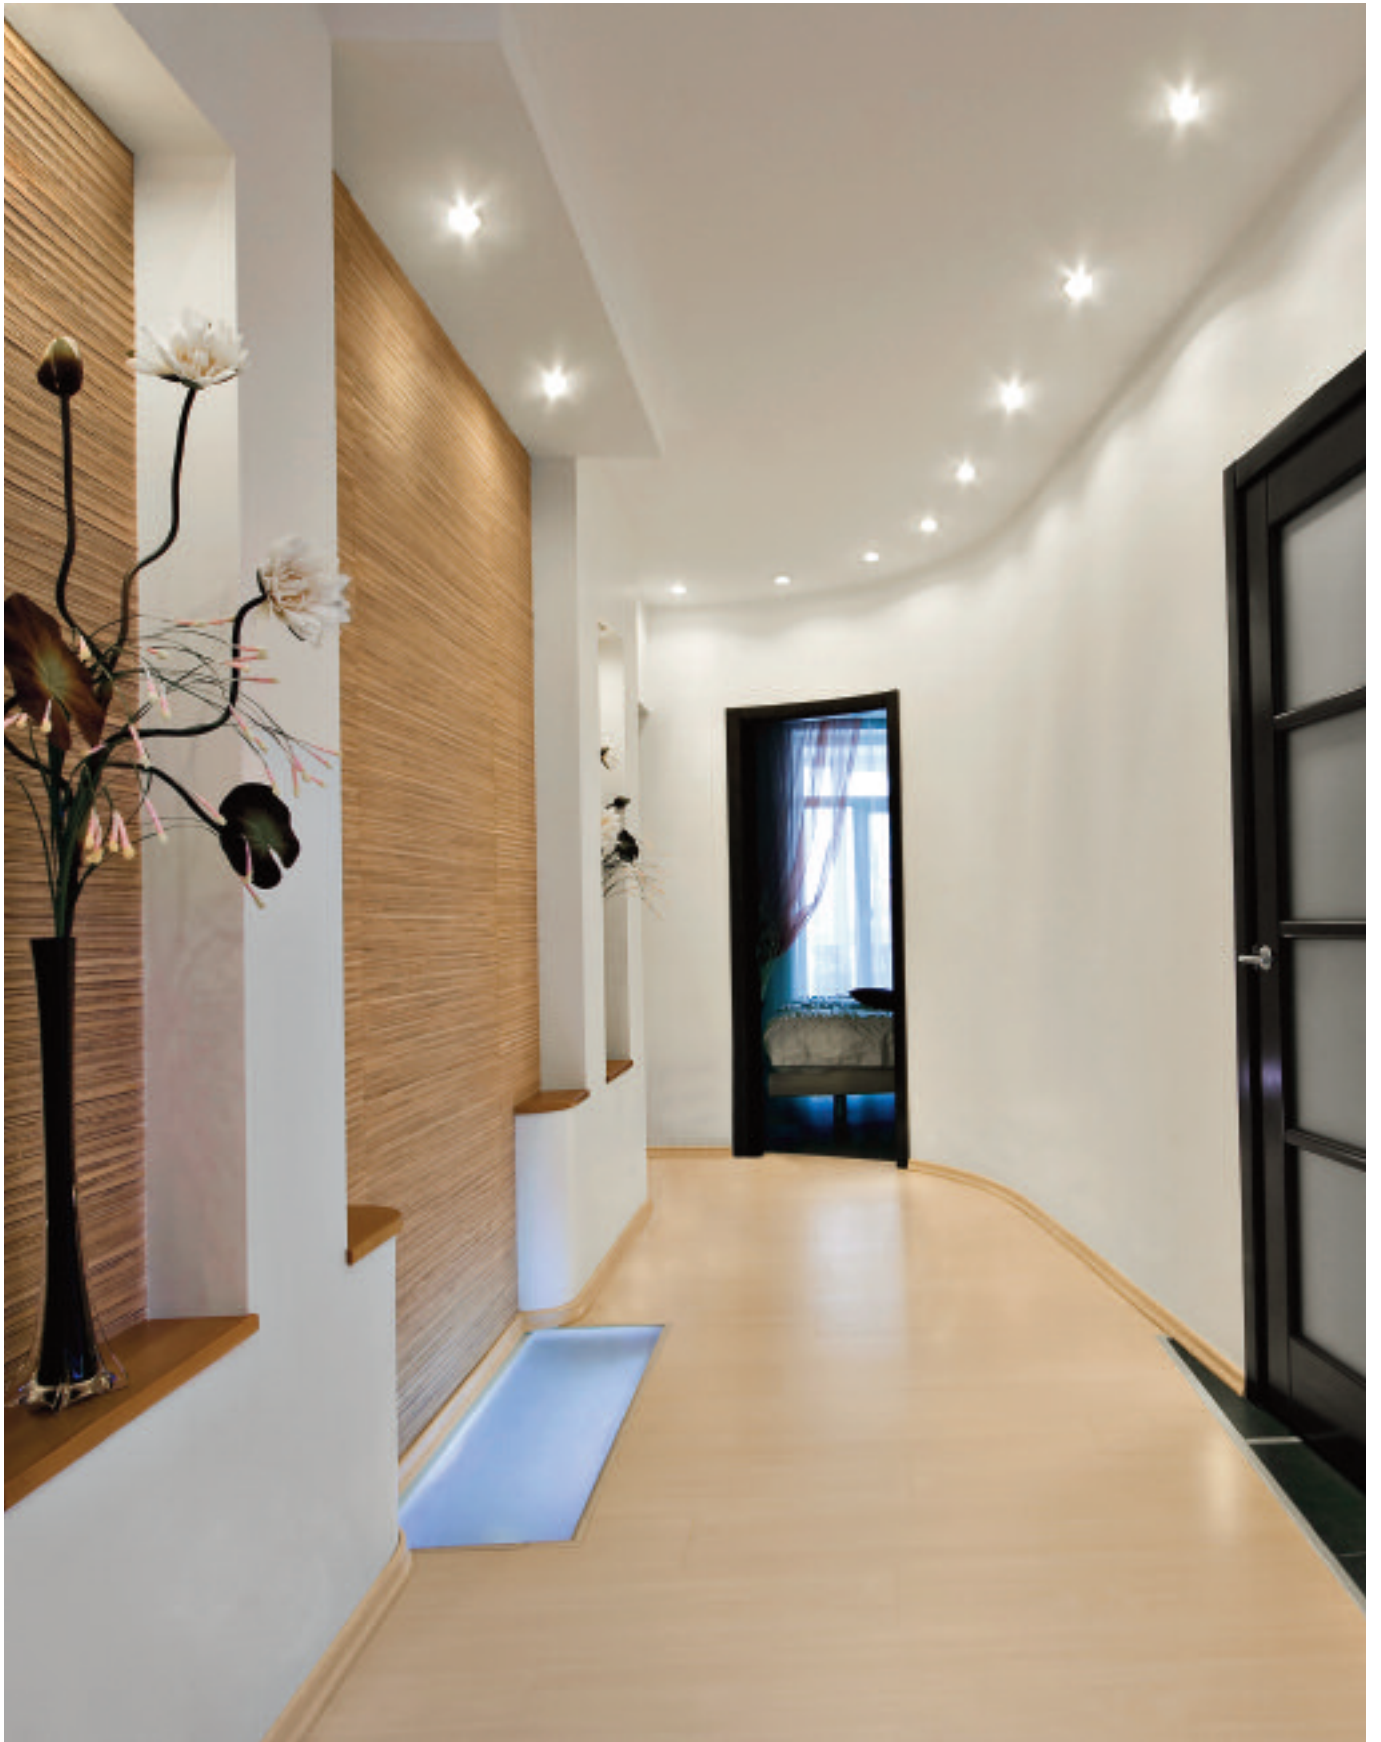

S808K3003AV



Code	Lamps Watt	Light beam	RGB
S808K3003 AU•BU	3x3,6	25°	



pag. 464


TO COMPLETE WITH LIGHT MANAGEMENT SYSTEM: SEE ON PAGE 480

Recessed LED projector for indoor.

Body and recessed ring: natural anodized or white painted aluminium.
PMMA Lens.

Line entry: PVC HT 105° 5x0,5 mmq cable L=30 cm (dimnable with separate remote unit).

Voltage: 24Vdc ballast has to be ordered separately (not included).

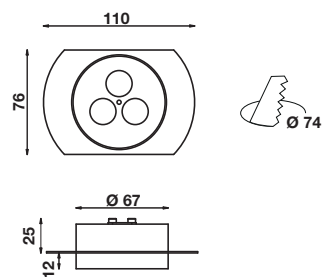

Colours



