



Cometa



Cometa

Indoor-outdoor lamps, suitable for ceiling or wall application adjustable. Led power application, for linear light distribution.

Materials

Body and dissipator in aluminium material. Cree, Seoul or Citizen Leds.

Accordingly to the standard CEI EN 60598-1 (CEI 34-21); CEI EN 62031 (34-118), CEI EN 62471 (76-9).



E810X0450AK



Code	Lamps Watt	Flux (Lm)	L mm	3200 K	
I810X0450 AK•BK	4x4	760	450	230V	CL I
I810X0600 AK•BK	5x4	950	600		
I810X1200 AK•BK	10x4	1900	1200		




Code	Lamps Watt	Flux (Lm)	L mm	3000 K	
S810X0450 AK•BK	4x4,6	1240	450	24V	
S810X0600 AK•BK	5x4,6	1550	600		
S810X1200 AK•BK	10x4,6	3100	1200		



Code	Lamps Watt	Flux (Lm)	L mm	4000 K	
S810Y0450 AK•BK	4x4,6	1360	450	24V	
S810Y0600 AK•BK	5x4,6	1700	600		
S810Y1200 AK•BK	10x4,6	3400	1200		



Aluminium LED Bar supplied with bracket for wall/ceiling fixing. 1,5 meter supply cable included.

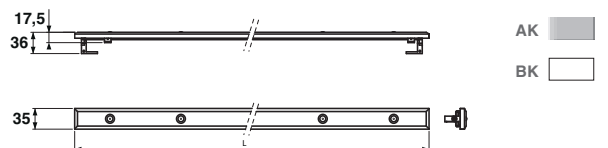

E810K0450BK



Code	Lamps Watt	L mm	RGB
S810K0450 AK•BK	4x3	450	
S810K0600 AK•BK	5x3	600	
S810K1200 AK•BK	10x3	1200	



TO COMPLETE WITH DRIVER AND LIGHT MANAGEMENT SYSTEM: SEE PAGE 464 AND PAGE 480

Aluminium Led bar RGB with bracket for wall/ceiling fixing. 1,5 meter supply cable included.

