

"Luce 2000"



"Luce 2000" | Pendant or wall lamp.

"Luce 2000"



"Luce 2000"

A2004NN



Code	Lamps Watt	L mm
A2004 BB•BN•NN•GN	2x36	1140
A2006 BB•BN•NN•GN	2x24	950
A2008 BB•BN•NN•GN	2x18	760



Pendant or wall lamp.

Base and cover wiring in zinc coated steel. Trimmings and accessories in thermoplastic material (same colour of the base):

- White base/cover and white trimmings (BB), white base/cover and black trimmings (BN).
- Black base/cover and black trimmings (NN).
- Grey base/cover and black trimmings (GN).

Reflector in white zinc coated steel.


Diffuser glazed, snapped on the base.

Starter wiring 230V-50Hz for compact fluorescent lamps, electrical components with ENEC approval. Rigid cable H05V2-U section 0,75 mm² (CEI 20-20). Socket terminal 2P+T (section max 2,5 mm²).

Possibilities: wall or ceiling fixing. Suspended, direct light, with accessory A2000.

Included accessories: thermoplastic spacers for wall or ceiling fixing.



In accordance with standard IEC 598, CEI EN 60598-1 (CEI 34-21).

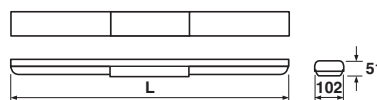

Colours
Base Finishing

BB		
BN		
NN		
GN		

"Luce 2000" Accessories

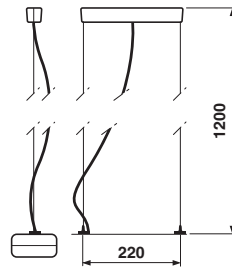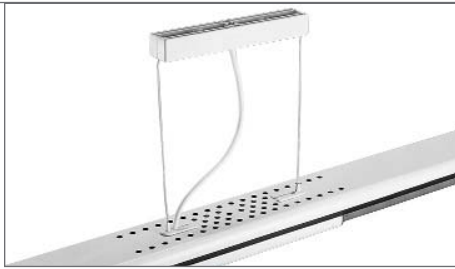

Code

A2000

Suspension.

Adjustable steel suspension with terminal block and cable.

