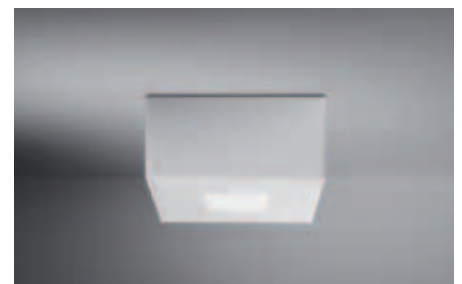




Adjustable wall mounted luminaire for discharge and very low voltage halogen lamps (12V).
 Fluorescent lamps
 Coated steel sheet frame.
 White opaline polycarbonate louver.
 Equipped with electronic ballast/transformer.

CODE	DESCRIPTION	Size (mm)
3155	MT (CDM-T) - 35/70W - G12 FSCH - 55W - 2GX13 100W max - 12V - G53 230V - 50Hz Colour: 01-18 IP 40	
	<p>Electronic ballast/transformer</p>	
3156	FSCH - 55W - 2GX13 MR (CDM-R111) - 70W - GX8.5 230V - 50Hz Colour: 01-18 IP 40	
	<p>Electronic ballast/transformer</p>	
3157	FSCH - 55W - 2GX13 230V - 50Hz Colour: 01-18	
	<p>Electronic ballast/transformer</p>	



01 white
 18 grey
 Can be adjusted separately on
 both axes.

NOTE

CODE	DESCRIPTION	Size (mm)
3159	<p>FSCH - 4x14W - G5 230V - 50Hz Colour: 01-18</p>  <p>Electronic ballast/transformer</p>	<p>630</p> <p>630</p> <p>165</p>
3158	<p>HMG (HALOSPOT111) 4 x 100W max - 12V - G53 FDH (T) - 4 x 14W - G5 230V - 50Hz Colour: 01-18 IP 40</p>  <p>Electronic ballast/transformer</p>	<p>630</p> <p>630</p> <p>165</p>

