







Floor-mounted recessed luminaire with LED light sources.
 Frame of anodised aluminium with front louver in tempered glass (15 mm thick) and anti-slip external finish.
 Provided with Ho5RN-F 2x1 mm² cable, 300 mm long for the white LED version, Ho5RN-F 4x0,5 mm² 300 mm long for the RGB LED version.

TYLE


CODE	DESCRIPTION	Size (mm)
1600 BIC 33 1600 BIN 33 1600 RGB 33	Module 100 x 100 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 12 LED smd 1W total - 12V - white LEDs 9 LED smd 2,2W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	 
Ballast to be ordered separately		
1601 BIC 33 1601 BIN 33 1601 RGB 33	Module 200 x 200 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 54 LED smd 4,3W total - 12V - white LEDs 54 LED smd 13W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	 
Ballast to be ordered separately		
1602 BIC 33 1602 BIN 33 1602 RGB 33	Module 300 x 300 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 135 LED smd 10,8W total - 12V - white LEDs 135 LED smd 32,2W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	 
Ballast to be ordered separately		




ACCESSORIES

500	Recessed box of stainless steel for code 1600 (A= 140 - B= 140 - C= 100 mm)
501	Recessed box of stainless steel for code 1601 (A= 254 - B= 254 - C= 100 mm)
502	Recessed box of stainless steel for code 1602 (A= 304 - B= 304 - C= 100 mm)
503	Recessed box of stainless steel for code 1603 (A= 404 - B= 404 - C= 100 mm)

500




501, 502, 503

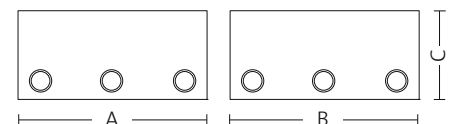


Size (mm)

Floor-mounted recessed luminaire with LED light sources.
 Frame of anodised aluminium with front louver in tempered glass
 (15 mm thick) and anti-slip external finish.
 Provided with Ho5RN-F 2x1 mm² cable, 300 mm long for the white
 LED version, Ho5RN-F 4x0,5 mm² 300 mm long for the RGB LED
 version.


CODE	DESCRIPTION	Size (mm)
1604 BIC 33	Module 250 x 60 mm hot white LED - 3000K	
1604 BIN 33	neutral white LED - 4500K	
1604 RGB 33	RGB LED	
	24 LED smd 2W total - 12V - white LEDs 24 LED smd 5,8W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	

Ballast to be ordered separately




1605 BIC 33	Module 300 x 60 mm hot white LED - 3000K	
1605 BIN 33	neutral white LED - 4500K	
1605 RGB 33	RGB LED	
	30 LED smd 2,4W total - 12V - white LEDs 30 LED smd 7,3W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	

Ballast to be ordered separately

1606 BIC 33	Module 400 x 60 mm hot white LED - 3000K	
1606 BIN 33	neutral white LED - 4500K	
1606 RGB 33	RGB LED	
	42 LED smd 3,4W total - 12V - white LEDs 42 LED smd 10,1W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	


Ballast to be ordered separately

1607 BIC 33	Module 500 x 60 mm hot white LED - 3000K	
1607 BIN 33	neutral white LED - 4500K	
1607 RGB 33	RGB LED	
	54 LED smd 4,4W total - 12V - white LEDs 54 LED smd 12,1W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	

Ballast to be ordered separately



ACCESSORIES

- 504** Recessed box of stainless steel for code 1604
(A= 64 - B= 254 - C= 100 mm)
- 505** Recessed box of stainless steel for code 1605
(A= 64 - B= 304 - C= 100 mm)
- 506** Recessed box of stainless steel for code 1606
(A= 64 - B= 404 - C= 100 mm)
- 507** Recessed box of stainless steel for code 1607
(A= 64 - B= 504 - C= 100 mm)

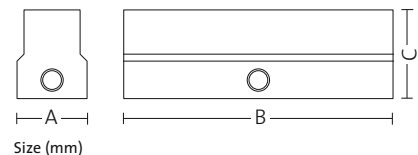


Floor-mounted recessed luminaire with LED light sources.
 Frame of anodised aluminium with front louver in tempered glass
 (15 mm thick) and anti-slip external finish.
 Provided with Ho5RN-F 2x1 mm² cable, 300 mm long for the white
 LED version, Ho5RN-F 4x0,5 mm² 300 mm long for the RGB LED
 version.


DESIGN - STEFANO DALL'OSSO

CODE	DESCRIPTION	Size (mm)
1608 BIC 33	Module 750 x 60 mm hot white LED - 3000K	
1608 BIN 33	neutral white LED - 4200K	
1608 RGB 33	RGB LED	
	84 LED smd 6,8W total - 12V - white LEDs 84 LED smd 20,1W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	
	Ballast to be ordered separately	
1609 BIC 33	Module 1000 x 60 mm hot white LED - 3000K	
1609 BIN 33	neutral white LED - 4200K	
1609 RGB 33	RGB LED	
	114 LED smd 9,2W totale- 12V - white LEDs 114 LED smd 27,3W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm	
	Ballast to be ordered separately	





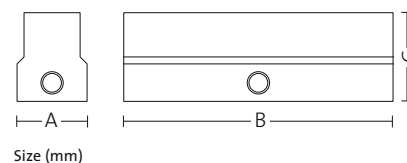

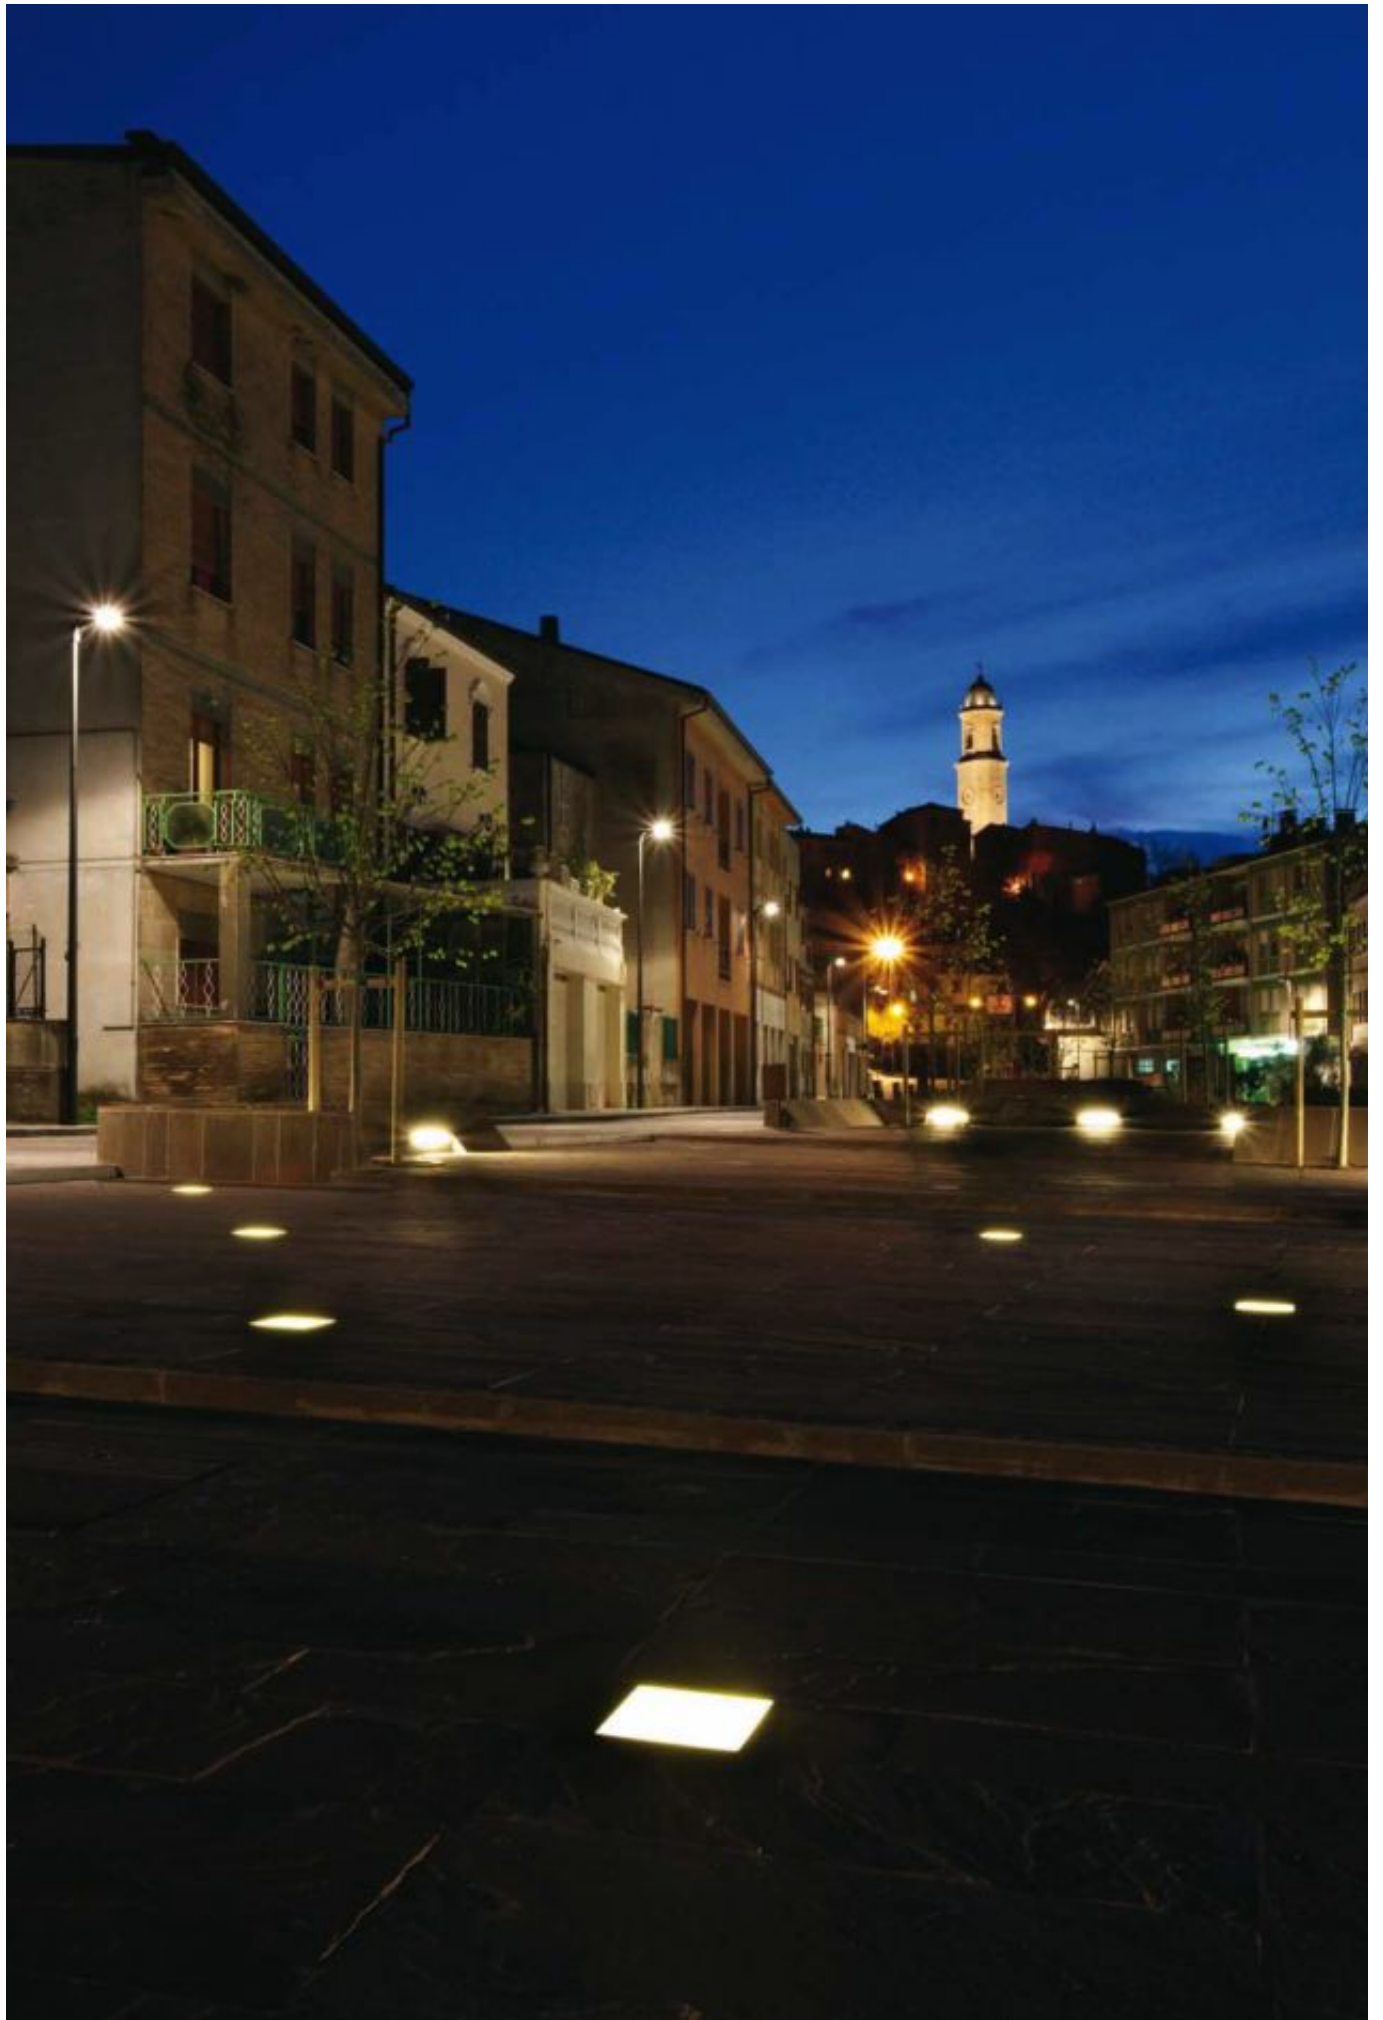ACCESSORIES	
508	Recessed box of stainless steel for code 1608 (A= 64 - B= 754 - C= 100 mm)
509	Recessed box of stainless steel for code 1609 (A= 64 - B= 1000 - C= 100 mm)






Floor-mounted recessed luminaire with LED light sources.
 Frame of anodised aluminium with front louver in tempered glass
 (15 mm thick) and anti-slip external finish.
 Provided with Ho5RN-F 2x1 mm² cable, 300 mm long for the white
 LED version, Ho5RN-F 4x0,5 mm² 300 mm long for the RGB LED
 version.


CODE	DESCRIPTION	Size (mm)
1610 BIC 33 1610 BIN 33 1610 RGB 33	Module diameter 100 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 15 LED smd 1,2W total - 12V - white LEDs 15 LED smd 3,6W total - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Provided with Ho5RN-F 2x1 mm ² cable (white LEDs), Ho5RN-F 4x0,5 mm ² (RGB LEDs) - cable length 300 mm Ballast to be ordered separately	
1611 BIC 33 1611 BIN 33 1611 RGB 33	Module diameter 200 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 39 LED smd 3,2W totale - 12V - white LEDs 39 LED smd 9,4W totale - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Fornito completo di cavo Ho5RN-F 2x1 mm ² (led bianchi), Ho5RN-F 4x0,5 mm ² (led RGB) - lunghezza cavi 300 mm Ballast to be ordered separately	
1612 BIC 33 1612 BIN 33 1612 RGB 33	Module diameter 300 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 87 LED smd 7W totale - 12V - white LEDs 87 LED smd 20,8W totale - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Fornito completo di cavo Ho5RN-F 2x1 mm ² (led bianchi), Ho5RN-F 4x0,5 mm ² (led RGB) - lunghezza cavi 300 mm Ballast to be ordered separately	
1613 BIC 33 1613 BIN 33 1613 RGB 33	Module diameter 300 mm hot white LED - 3000K neutral white LED - 4200K RGB LED 183 LED smd 14,8W totale - 12V - white LEDs 183 LED smd 43,8W totale - 12V - RGB LEDs IP 67 IK08 mechanical shocks 2000 Kg static load Fornito completo di cavo Ho5RN-F 2x1 mm ² (led bianchi), Ho5RN-F 4x0,5 mm ² (led RGB) - lunghezza cavi 300 mm Ballast to be ordered separately	



510



511, 512, 513



Size (mm)

ACCESSORIES


- 510** Recessed box of stainless steel for code 1610
(A= \varnothing 104 - B= 100)
- 511** Recessed box of stainless steel for code 1611
(A= \varnothing 204 - B= 100)
- 512** Recessed box of stainless steel for code 1612
(A= \varnothing 304 - B= 100)
- 513** Recessed box of stainless steel for code 1613
(A= \varnothing 404 - B= 100)

CODE	DESCRIPTION
------	-------------


The ballast cannot be placed into the recessed box with the luminaire.
A remote box must be provided instead.

413	Ballast 12V - 12W - IP20	
-----	--------------------------	--


Size (mm)



414	Ballast 12V - 25W - IP20	
-----	--------------------------	--

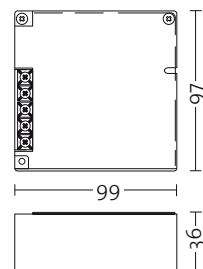

419	Ballast 12V - 60W - IP20	
-----	--------------------------	--

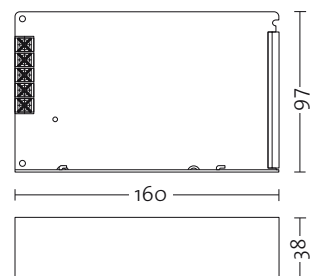

454	Ballast for RGB LEDs 12V - 50W - IP40	
-----	---------------------------------------	--

