













Recessed luminaire for wall, ceiling, floor with LED lighting system.
 Ballast not included.
 Luminaire housing: stainless steel painted or anodized.
 350 mA stabilised DC power supply.

MICROLIGHT

CODE	DESCRIPTION	Size (mm)
1500 BIC 1500 BIN 1501 BIC 1501 BIN	Single emission - hot white LED - 3000K Single emission - neutral white LED - 4200K Double emission - hot white LED - 3000K Double emission - neutral white LED - 4200K 1 LED - 1W - 350mA max Colour: 01 - 02 - 14 - 33 IP 40 Ballast to be ordered separately	 35 50
		 Ø20
1502 BIC 1502 BIN 1503 BIC 1503 BIN	Single emission - hot white LED - 3000K Single emission - neutral white LED - 4200K Double emission - hot white LED - 3000K Double emission - neutral white LED - 4200K 1 LED - 1W - 350mA max Colour: 01 - 02 - 14 - 33 IP 40 Ballast to be ordered separately	 35 70
		 Ø20
1504 BIC 1504 BIN 1505 BIC 1505 BIN	Single emission - hot white LED - 3000K Single emission - neutral white LED - 4200K Double emission - hot white LED - 3000K Double emission - neutral white LED - 4200K 1 LED - 1W - 350mA max Colour: 01 - 02 - 14 - 33 IP 40 Ballast to be ordered separately	 35 50
		 Ø20
1506 BIC 1506 BIN	With cross projection hot white LED - 3000K neutral white LED - 4200K 1 LED - 1W - 350mA max Colour: 01 - 02 - 14 - 33 IP 40 Ballast to be ordered separately	 35 50
		 Ø20



01 white
 02 black
 14 chrome
 33 anodised natural

NOTE



Recessed luminaire for wall, ceiling, floor with LED lighting system.
 Ballast not included.
 Luminaire housing: painted or anodized aluminum.
 350 mA stabilised DC power supply.

MICROLIGHT


DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION	Size (mm)
------	-------------	-----------


1510 BIC hot white LED - 3000K
1510 BIN neutral white LED - 4200K
 1 LED - 1W - 350mA max
 Colour: 01 - 02 - 14 - 33
 IP 40
 Ballast to be ordered separately





1511 BIC hot white LED - 3000K
1511 BIN neutral white LED - 4200K
 1 LED - 1W - 350mA max
 Colour: 01 - 02 - 14 - 33
 IP 40
 Ballast to be ordered separately



1512 BIC 30 **Projection with lens**
 30° beam, hot white LED - 3000K
1512 BIN 30 30° beam, neutral white LED - 4200K
 1 LED - 1W - 350mA max
 Colour: 01 - 02 - 14 - 33
 IP 40
 Ballast to be ordered separately



1513 BIC 30 **Projection with lens**
 30° beam, hot white LED - 3000K
1513 BIN 30 30° beam, neutral white LED - 4200K
 1 LED - 1W - 350mA max
 Colour: 01 - 02 - 14 - 33
 IP 40
 Ballast to be ordered separately

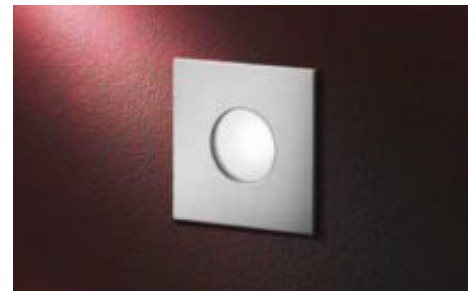


ACCESSORIES

- 805** Adapter for installation on branch boxes
- 440** Ballast IP20 350mA - connection of up to 2 luminaires
- 441** Ballast IP20 350mA - connection of up to 9 luminaires
- 803** Aluminium recessed box for installation in brick walls (only for codes 1512-1513 - indoor use only)
- 802** Aluminium recessed box for installation in brick walls (only for codes 1510-1511 - indoor use only)


- 01 white
- 02 black
- 14 chrome
- 33 anodised natural


NOTE

Recessed luminaire for wall, ceiling, floor with LED lighting system.
 Ballast not included.
 Luminaire housing: stainless steel painted or anodized.
 350 mA stabilised DC power supply.

CODE	DESCRIPTION	Size (mm)
1522 BIC	hot white LED - 3000K	
1522 BIN	neutral white LED - 4200K 1 LED - 1W - 350mA max Colour: 52 IP 67 500 Kg static load Ballast to be ordered separately Supplied with 25 cm HO5RN-F 2x1 mm ² output cable	




1524 BIC	Con palpebra hot white LED - 3000K	
1524 BIN	neutral white LED - 4200K 1 white LED - 1W - 350mA max Colour: 52 IP 67 Ballast to be ordered separately Supplied with 25 cm HO5RN-F 2x1 mm ² output cable	

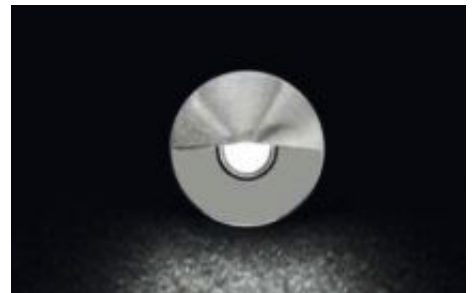

ACCESSORIES

800	Plastic recessed box
801	Aluminium recessed box for installation in brick walls (indoor use only)
440	Ballast IP20 350mA - connection of up to 2 luminaires
441	Ballast IP20 350mA - connection of up to 9 luminaires

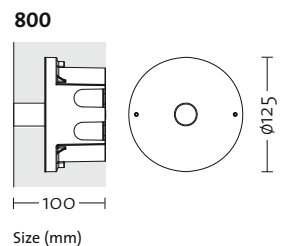


52 stainless steel

NOTE


Recessed luminaire for wall, ceiling, floor with LED lighting system.
 Ballast not included.
 Luminaire housing: stainless steel painted or anodized.
 350 mA stabilised DC power supply.


MICROLIGHT

DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION	Size (mm)
1520 BIC	hot white LED - 3000K	
1520 BIN	neutral white LED - 4200K 1 white LED - 1W - 350mA max Colour: 52 IP 67 Ballast to be ordered separately Supplied with 25 cm HO5RN-F 2x1 mm ² output cable	




1521 BIC	hot white LED - 3000K	
1521 BIN	neutral white LED - 4200K 1 white LED - 1W - 350mA max Colour: 52 IP 67 Ballast to be ordered separately Supplied with 25 cm HO5RN-F 2x1 mm ² output cable	

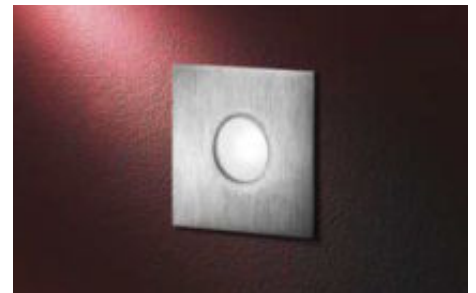

ACCESSORIES

800	Plastic recessed box
801	Aluminium recessed box for installation in brick walls (indoor use only)
440	Ballast IP20 350mA - connection of up to 2 luminaires
441	Ballast IP20 350mA - connection of up to 9 luminaires

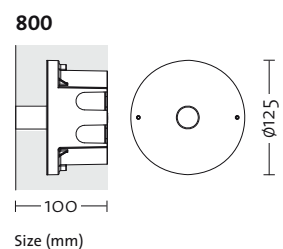

52 stainless steel

NOTE