

| CODE | DESCRIPTION | |
|--|---|--|
| 6020 BIF 10 6020 BIF 20 6020 BIF 30 6020 BIF ET 6020 BIC 10 6020 BIC 20 6020 BIC 30 6020 BIC ET | Module 500 mm 10° beam, cold white LED 20° beam, cold white LED 30° beam, cold white LED 10°x 40° beam, cold white LED 10° beam, hot white LED 20° beam, hot white LED 30° beam, hot white LED 10°x 40° beam, hot white LED 9 LED – 12.6W total - 12VDC Colour: 33 - IP 67 Ballast to be ordered separately. Provided with length of cable 1000 mm HO5RN-F 2x1 mm ² , black | |
| 6021 BIF 10 6021 BIF 20 6021 BIF 30 6021 BIF ET 6021 BIC 10 6021 BIC 20 6021 BIC 30 6021 BIC ET | Module 1000 mm 10° beam, cold white LED 20° beam, cold white LED 30° beam, cold white LED 10°x 40° beam, cold white LED 10° beam, hot white LED 20° beam, hot white LED 30° beam, hot white LED 10°x 40° beam, hot white LED 18 LED – 25.2W total - 12VDC Colour: 33 - IP 67 Ballast to be ordered separately. Provided with length of cable 1000 mm HO5RN-F 2x1 mm ² , black | |
| 6022 BIF 10 6022 BIF 20 6022 BIF 30 6022 BIF ET 6022 BIC 10 6022 BIC 20 6022 BIC 30 6022 BIC ET | Module 1500 mm 10° beam, cold white LED 20° beam, cold white LED 30° beam, cold white LED 10°x 40° beam, cold white LED 10° beam, hot white LED 20° beam, hot white LED 30° beam, hot white LED 10°x 40° beam, hot white LED 27 LED – 37.8W total - 12VDC Colour: 33 - IP 67 Ballast to be ordered separately. Provided with length of cable 1000 mm HO5RN-F 2x1 mm ² , black | |
| 414 419 | 12V - 25W ballast 12V - 60W ballast | |




| MODULE LENGTH | A |
|---------------|------|
| 6020 | 500 |
| 6021 | 1000 |
| 6022 | 1502 |



Dimensions in mm

| ACCESSORIES | |
|--|---|
| 840 | High-bay mounting kit 2 steel supporting cables with jack Complete with ceiling rose (length of cables: 2100 mm) |
| 841 842 984 | Brackets 1 bracket for wall mounting 2 brackets for ceiling mounting 2 adjustable brackets for wall mounting |




840

842

841

984

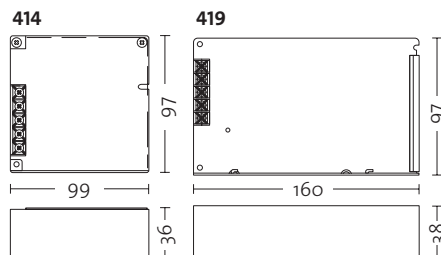

33 anodised natural

NOTES