


Adjustable projector for very low voltage halogen and discharge lamps.
With PF-corrected electronic ballast and tempered glass front louver.


CODE	DESCRIPTION	
5120	Track-mounted type MT (CDM-TC) - 35W - G8,5 - 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 - Kg 4.60 Reflector 2 x 18°	   
5121	Track-mounted type MT (CDM-TC) - 70W - G8,5 - 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 Reflector 2 x 18° IP 40 - Kg 5.60	   
5122	Track-mounted type HRGI - 50W max - 12V - GU5,3 - 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 - Kg 4.60	   
5128	Type with base MT (CDM-TC) - 35W - G8,5 - 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 - Kg 4.60 Reflector 2 x 18°	   
5128/70	Type with base MT (CDM-TC) - 70W - G8,5 - 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 - Kg 5.60 Reflector 2 x 18°	   
5129	Type with base HRGI - 50W max - 12V - GU5,3 230V - 50Hz Electronic ballast Colour: 01 - 02 - 18 IP 40 - Kg 4.60	   

ACCESSORIES


- 650 Anti-glare honeycomb shield
- 651 Yellow, red, blue, green-coloured filters
- 652 Wall-washer shield
- 654 Directional louvers
- 653 Reflector 2 x 5° (only for code 5120, 5121, 5128, 5128 70)
- 639 Reflector 2 x 30° (only for code 5120, 5121, 5128, 5128 70)

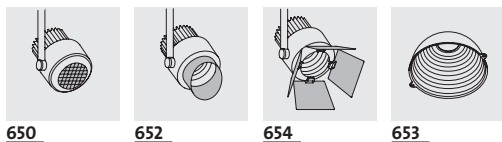


PHOTOMETRIC CURVES

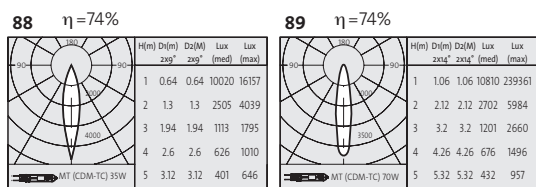

5120 - 5121 - 5122

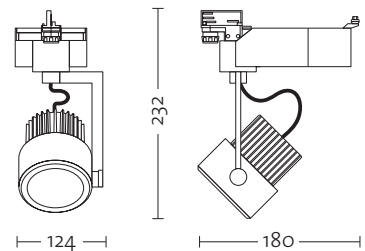









5128 - 5128/70 - 5129





Size (mm)

- 01 white
- 02 black
- 18 grey

NOTE

CODE	DESCRIPTION	
5123	Track-mounted type HMG (NO COOL BEAM) - 50W max - GZ10 250V max Colour: 01 - 02 - 18 IP 40 Kg 2.90	   
5125	Type with base HMG (NO COOL BEAM) - 50W max - GZ10 250V max Colour: 01 - 02 - 18 IP 40 Kg 3.30	   



Size (mm)

- 01 white
- 02 black
- 18 grey

NOTE