


DOMINO

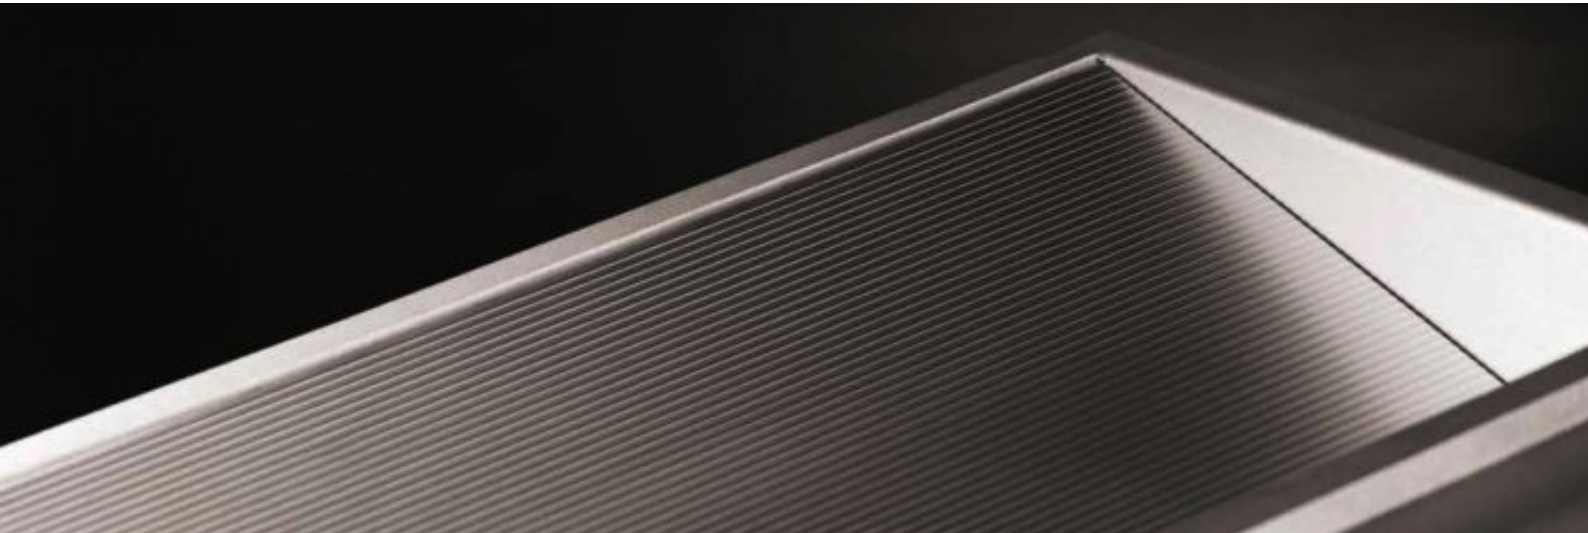

Technical specifications

Made of epoxy polyester steel sheet, Domino has a special surface which reflects the wrinkled aluminium optical component.

All luminaires have a satin tempered glass louver which protects against accidental contacts with live parts and allows to clean the optical assembly easily. The luminaires can accommodate mains voltage lamps, very low voltage lamps and compact fluorescent lamps.

The recessed frame in hot-galvanised steel is optional.

Optical components and light sources

Wrinkled aluminium optical component for Domino, using: mains voltage halogen lamps (150 W max 250V max R7s 60 W max 250V max G9), very low halogen lamps (50 W max 12V GY6.35), and compact fluorescent lamps (26 W G24d-3 55 W 2G11).


MAINS VOLTAGE HALOGEN LAMPS


	HS - G9	max 60W
---	---------	---------


VERY LOW VOLTAGE HALOGEN LAMPS 12V

	HSG - 12V - GY6.35	max 50W
---	--------------------	---------

FLUORESCENT LAMPS

	FSQH (TC-D) - G24q-3	26W
---	----------------------	-----

	FSDH (TC-L) - 2G11	55W
---	--------------------	-----

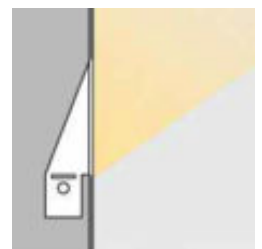

With plasterboard walls, the luminaire does not require any recessed frame.

Domino wide and comprehensive range of luminaires allow to wall mount these square and rectangular recessed systems provided in six sizes (the largest version is 240 x 360 mm, the smallest is 90 x 90 mm) to meet a large number of applications. These luminaires provide soft light, reflected by the wide front reflector. The very small recessed depth - 83 mm for the luminaire and 90 mm for the sheet recessed box - allows for both standard wall mounting (with the special wall recessed box) and installation in plasterboard partition walls.



Structural features

Installation: recessed wall-mounting

Luminaire housing: steel sheet

Louver: satin tempered glass

Reflector: wrinkled aluminium

Light sources: mains voltage halogen lamps, very low halogen lamps (12V), and compact fluorescent lamps




Standard finishing: grey

Protection class: IP40

Insulation class: I - III

Power supply: 230V - 50Hz, 12V - 250V max

The recessed luminaires of the Domino family illuminate the environment with a soft light which is reflected by the large front reflector in wrinkled aluminium.

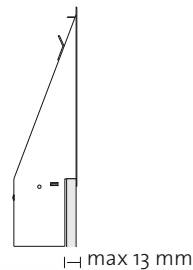


Recessed frame in hot-galvanised steel with front grid. Collar for 10 mm wall finishing.

For the installation of all the other luminaires, the optical component should be directed upwards. max 13 mm.



Recessed frame installation in a wall. For installation in mobile walls, max depth of panels should be 13 mm. The installation of the luminaire with the optical component directed downwards requires the recessed frame for code 3003 EL, 3005 EL, 3007 EL, 3003 R, 3005 R.

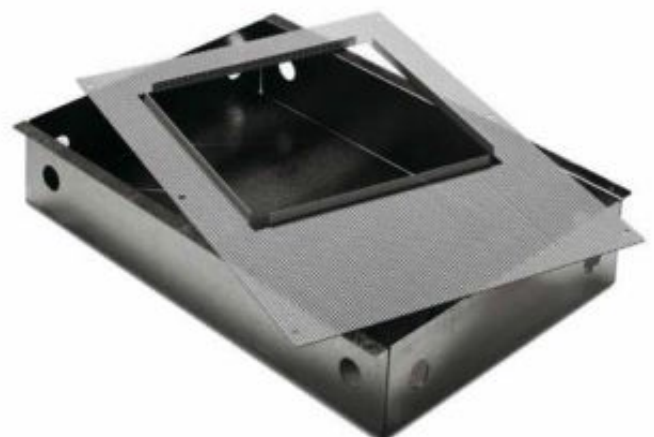


CODE	DESCRIPTION	Size (mm)
3003 EL	FSQH (TC-D) - 26W - G24q-3 230V - 50Hz Colour: 01 - 18 IP 40 Kg 2.20 Electronic ballast	
3005 EL	FSQH (TC-D) - 26W - G24q-3 230V - 50Hz Colour: 01 - 18 IP 40 Kg 2.40 Electronic ballast	
3007 EL	FSQH (TC-D) - 26W - G24q-3 230V - 50Hz Colour: 01 - 18 IP 40 Kg 2.00 Electronic ballast	




ACCESSORIES

- 953** Recessed frame in hot-galvanized steel - For code 3003 EL
Dimensions: width 310 mm, height 420 mm, depth 90 mm
- 954** Recessed frame in hot-galvanized steel - For code 3005 EL
Dimensions: width 310 mm, height 540 mm, depth 90 mm
- 955** Recessed frame in hot-galvanized steel - For code 3007 EL
Dimensions: width 310 mm, height 300 mm, depth 90 mm

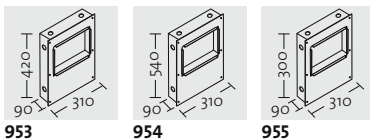

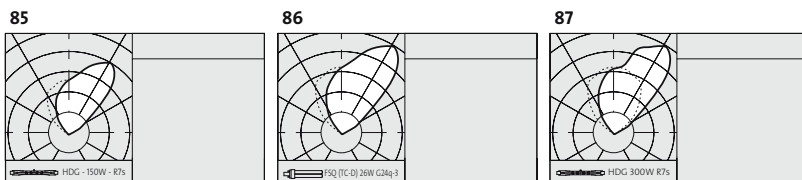



PHOTOMETRIC CURVES




01 white
18 grey
NOTE




Recessed wall-mounted luminaire for compact fluorescent lamps.
Equipped with electronic ballast.

CODE	DESCRIPTION		Size (mm)
3008	FSDH (TC-L) - 55W - 2G11 230V - 50Hz Colour: 01 - 18 IP 40 Kg 3.90	 	 

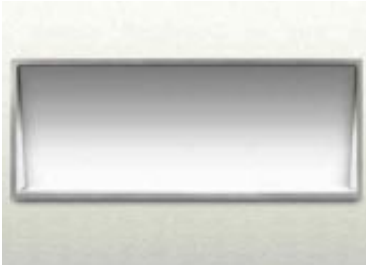

ACCESSORIES

- 956** Recessed frame in hot-galvanized steel
Dimensions: width 640 mm, height 450 mm, depth 90 mm
- 416** Electric transformer 70W - Dimensions: 110 x 50 x 35 mm
- 417** Electric transformer 105W - Dimensions: 110 x 50 x 35 mm
- 418** Electric transformer 200W - Dimensions: 225 x 55 x 45 mm

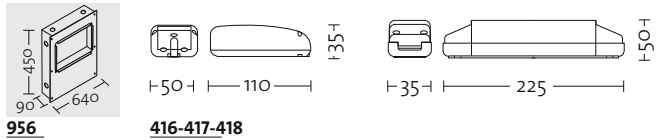

























01 white
18 grey
NOTE

Recessed wall-mounted luminaire for mains voltage halogen lamps or very low voltage lamps (12V).
Ballast not included.

DOMINO

DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION		Size (mm)		
3009	HSG - 50W max - 12V - GY6.35 Colour: 01 - 18 IP 40 Kg 0.50	  	 120	 83	 75
3010	HS - 60W max - G9 250V max Colour: 01 - 18 IP 40 Kg 0.50	  	 90	 83	 75
3011	HSG - 50W max - 12V - GY6.35 Colour: 01 - 18 IP 40 Kg 0.70	  	 240	 83	 225
3012	HS - 60W max - G9 250V max Colour: 01 - 18 IP 40 Kg 0.70	  	 90	 83	 75



01 white
18 grey

NOTE