






M30 LIGHT CURTAIN

- RECESSED LUMINAIRE
- **m**-SYSTEM: CONTINUOUS LIGHT IN LENGTHS OF 1M, 2M, 3M OR 4M
- CONTINUOUS LIGHT CURTAIN WITH BLACK SHUTTER
- INTEGRAL LOW VOLTAGE HIGH PERFORMANCE TRACK 4 X 4MM² FOR LED POWER SUPPLY (MAX 600W/24V)
- MINIMAL AMOUNT OF FEEDS FOR LONG RUNS
- EXTRUDED ALUMINIUM PROFILE
- RECESSED LUMINAIRE FOR 12.5MM PLASTER CEILING, WALL OR CEILING MOUNTED
- FOR 15MM PLASTER CEILING, OTHER CONFIGURATIONS ON REQUEST
- WHITE FINISH

M30 LIGHT CURTAIN WITH TRIM



M30 LIGHT CURTAIN TRIMLESS

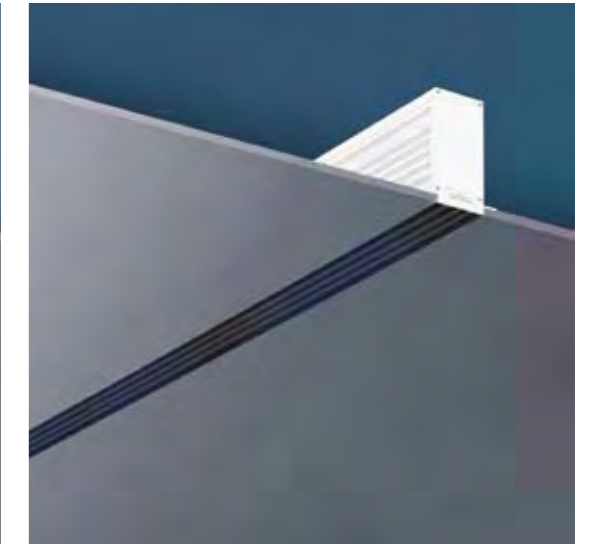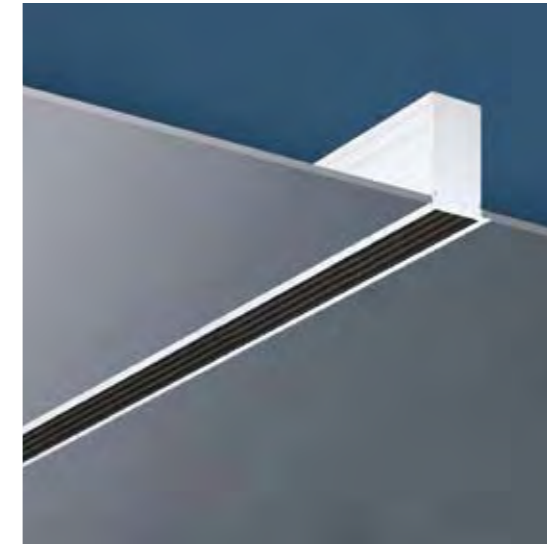



M30 LIGHT CURTAIN WITH TRIM

	WHITE	L	B	H	C	W
White LED	SX 73136-359-1	1000	51	75	L x 38	1.2kg



M30 LIGHT CURTAIN TRIMLESS

	WHITE	L	B	H	C	W
White LED	SX 73336-359-1	1000	63	75	L x 38	1.2kg

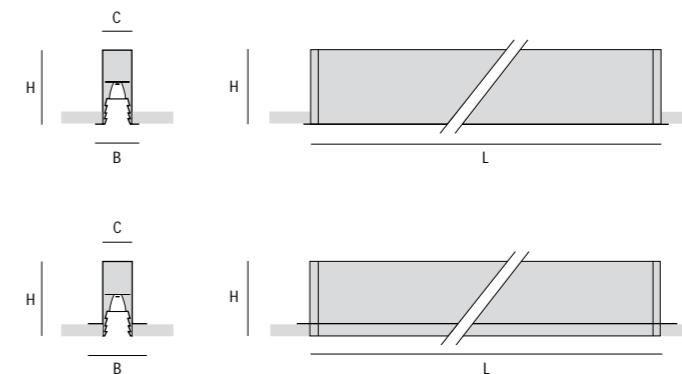

L: Length · B: Width · H: Height · C: Ceiling cut-out · W: Weight · **m**-System: continuous light in lengths of 1m, 2m, 3m, 4m
 Light curtain modules can be cut on site in increments of 333mm, approx. 15W/m · Photometrics on request