

neo | STALACTITE

- PENDANT OR SURFACE MOUNTED LUMINAIRE WITH REMOTE BALLAST
- OMNIDIRECTIONAL LIGHT
- LUMINAIRE BODY MADE OF SHARP-EDGED GLOSS POLISHED ALUMINIUM
- PROFILE ENCLOSED BY FACET CUT FLUSH GLASS COVERS
- SYSTEM PARTS AND SUSPENSIONS MADE OF HIGH GLOSS POLISHED DIE-CAST ALUMINIUM
- ALUMINIUM SILVER FINISH GLOSS POLISHED

neo | STALACTITE PENDANT



neo | STALACTITE RECESSED




neo | STALACTITE PENDANT

		H	S	ET	W	DATA
14W	SX 734 114 114/..	620	700	50 x 300	4.2kg	4260-14
21W	SX 734 114 121/..	920	700	50 x 300	5.4kg	4260-21
28W	SX 734 114 128/..	1220	1000	50 x 300	7.0kg	4260-28
35W	SX 734 114 135/..	1520	1000	50 x 300	8.6kg	4260-35



neo | STALACTITE RECESSED

		H	C	ET	W	DATA
18W	SX 734 014 118/..	210	113	110	2.0kg	4250-18
24W	SX 734 014 124/..	310	113	110	2.5kg	4250-24
36W	SX 734 014 136/..	405	113	110	3.0kg	4250-36

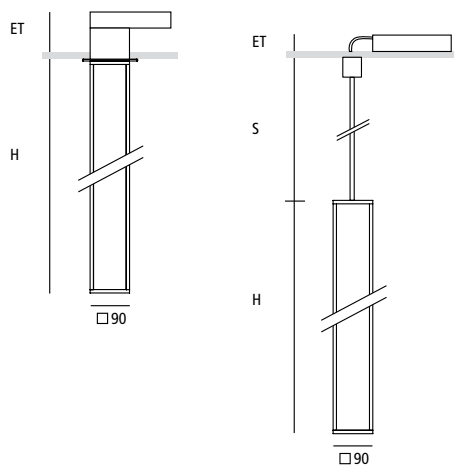

H: Height · S: Suspension can be cut on site · C: Ceiling cut · ET: Installation depth · W: Weight
 Add suffix for dimming and control version: .../00 = No dim · .../04 = 1-10V · .../05 = DSI · .../06 = DALI · .../07 = Touch dim



neo|STALACTITE

HIGH
LIGHTS
2010

