


M60 OPAL

- RECESSED LUMINAIRE
- **m**-SYSTEM: CUSTOMER SPECIFIES LENGTH OF MODULE
- OPAL PC DIFFUSER WITH STAGGERED LAMP POSITION FOR CONTINUOUS RUNS WITH EXCELLENT UNIFORMITY
- EXTRUDED ALUMINIUM PROFILE


M60 OPAL WITH TRIM

M60 OPAL TRIMLESS





M60 OPAL WITH TRIM

		SILVER	L	B	H	C	W	DATA
1 x 35 / 28 / 21W	m -System	SX 74953-976-3	var.	76	90	L x 64	4.1kg/m	4807



M60 OPAL TRIMLESS

		WHITE	L	B	H	C	W	DATA
1 x 35 / 28 / 21W	m -System	SX 75053-976-1	var.	120	90	L x 64	6.5kg/m	4807

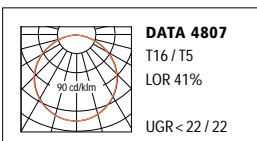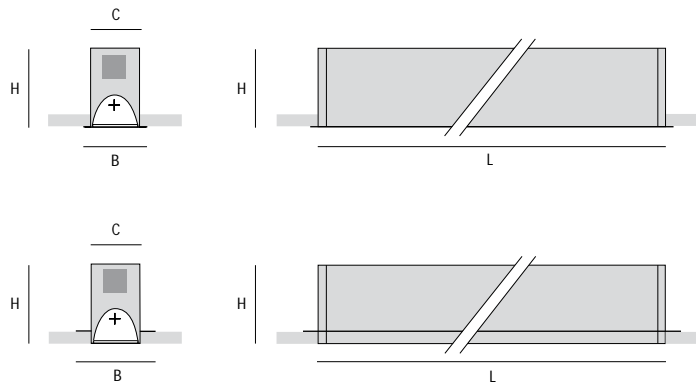

L: Length - B: Width - H: Height - C: Ceiling cut-out - W: Weight

Dimmable versions: .../04 = 1-10V · .../05 = DSI · .../06 = DALI · For **m**-system end plates and suspensions have to be ordered separately – see page 103

END FLANGE




SILVER **B**
SX 98-101-3 10mm

END PLATE



WHITE **ST**
SX 98-102-1 2mm

PROFILE SNAP HANGER



SX 99-259-0 set of 6

SUSPENSION FOR M6 THREAD MOUNTING



SX 88-888-0

ROTATING CROSS BAR



SX 99-416-0 set of 2

RECESSED DOWNLIGHT INFILL



SILVER **WHITE**
SX 99-715-3 **SX 99-715-1** QPAR 16 lamp for mains voltage