


M60x110 CASSETTE

- PENDANT OR SURFACE MOUNTED LUMINAIRE
- DIRECT / INDIRECT, AVAILABLE WITH DUAL SWITCHING ON REQUEST
- MICROPRISMATIC MULTILAYER DIFFUSER – HIGHLY ADVANCED ANTI-GLARE CHARACTERISTICS (UGR < 19)
- SATIN ACRYLIC DIFFUSER
-  SATIN FINISH PARABOLIC LOUVRE – SUITABLE FOR VDU WORKSPACES (L < 1000 CD/M² FOR GAMMA ≥ 65°)
- DIMMABLE VERSIONS ON REQUEST
- SQUARE-EDGED EXTRUDED ALUMINIUM
- END CAPS OF DIE-CAST ALUMINIUM
- SILVER FINISH

M60x110 MICROPRISMS / SATINÉ

M60x110 PARABOLIC



M60x110 MICROPRISMS

		SILVER	L	B	H	P	W	DATA
1 x 28W (D) / 21W (I)	single length	SX 745 013 128	1190	60	110	1100	4.0kg	4806/12
1 x 35W (D) / 28W (I)	single length	SX 745 013 135	1490	60	110	1400	5.0kg	4806/12
2 x 1 x 28W (D) / 21W (I)	double length	SX 745 023 128	2370	60	110	1140	8.0kg	4806/12
2 x 1 x 35W (D) / 28W (I)	double length	SX 745 023 135	2970	60	110	1440	10.0kg	4806/12





M60x110 SATINÉ

		SILVER	L	B	H	P	W	DATA
1 x 28W (D) / 21W (I)	single length	SX 774 013 128	1190	60	110	1100	4.0kg	4808/12
1 x 35W (D) / 28W (I)	single length	SX 774 013 135	1490	60	110	1400	5.0kg	4808/12
2 x 1 x 28W (D) / 21W (I)	double length	SX 774 023 128	2370	60	110	1140	8.0kg	4808/12
2 x 1 x 35W (D) / 28W (I)	double length	SX 774 023 135	2970	60	110	1440	10.0kg	4808/12



M60x110 PARABOLIC

		SILVER	L	B	H	P	W	DATA
1 x 28W (D) / 21W (I)	single length	SX 787 013 128	1190	60	110	1100	4.0kg	4810/12
1 x 35W (D) / 28W (I)	single length	SX 787 013 135	1490	60	110	1400	5.0kg	4810/12
2 x 1 x 28W (D) / 21W (I)	double length	SX 787 023 128	2370	60	110	1140	8.0kg	4810/12
2 x 1 x 35W (D) / 28W (I)	double length	SX 787 023 135	2970	60	110	1440	10.0kg	4810/12

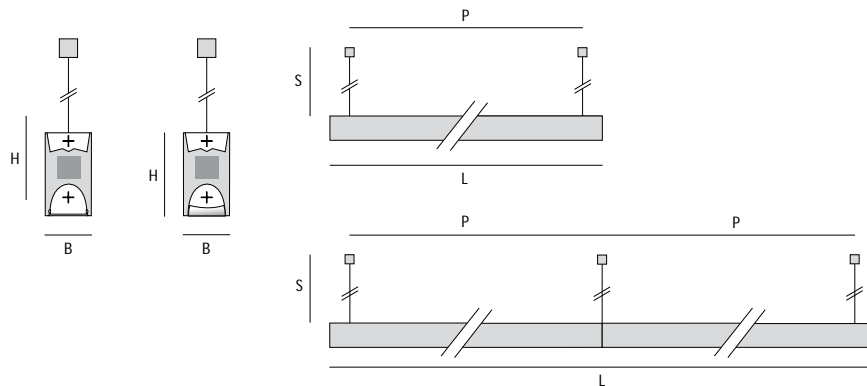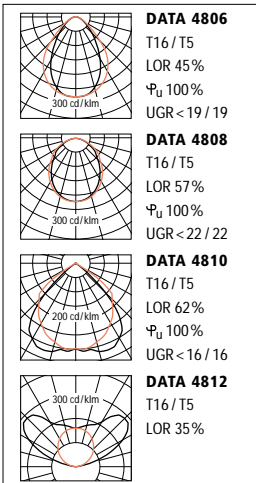

L: Length · B: Width · H: Height · P: Distance between suspension points · W: Weight · S: Suspension, 1500mm suspension can be cut on site

