


M60x45 CASSETTE

- PENDANT OR SURFACE MOUNTED LUMINAIRE
- DIRECT / INDIRECT
- SATIN ACRYLIC DIFFUSER
-  SATIN FINISH PARABOLIC LOUVRE – SUITABLE FOR VDU WORKSPACES (L<1000 CD/M² FOR GAMMA≥65°)
- DIMMABLE VERSIONS ON REQUEST
- SQUARE-EDGED EXTRUDED ALUMINIUM
- END CAPS OF DIE-CAST ALUMINIUM
- SILVER FINISH

M60x45 SATINÉ



M60x45 PARABOLIC



M60x45 SATINÉ

		SILVER	L	B	H	P	W	DATA
1 x 28W	single length	SX 788 013 128	1740	60	45	1455	1.5 kg	4804
1 x 35W	single length	SX 788 013 135	2040	60	45	1755	1.8 kg	4804
2 x 1 x 28W	double length	SX 788 023 128	3195	60	45	1460	3.0 kg	4804
2 x 1 x 35W	double length	SX 788 023 135	3795	60	45	1610	3.6 kg	4804




M60x45 PARABOLIC

		SILVER	L	B	H	P	W	DATA
1 x 54W	single length	SX 786 013 154	1740	60	45	1455	1.5 kg	4803
1 x 80W	single length	SX 786 013 180	2040	60	45	1755	1.8 kg	4803
2 x 1 x 54W	double length	SX 786 023 154	3195	60	45	1460	3.0 kg	4803
2 x 1 x 80W	double length	SX 786 023 180	3795	60	45	1610	3.6 kg	4803



LINEAR PENDANT AND SURFACE MOUNTED

038 se'lux INTERIOR

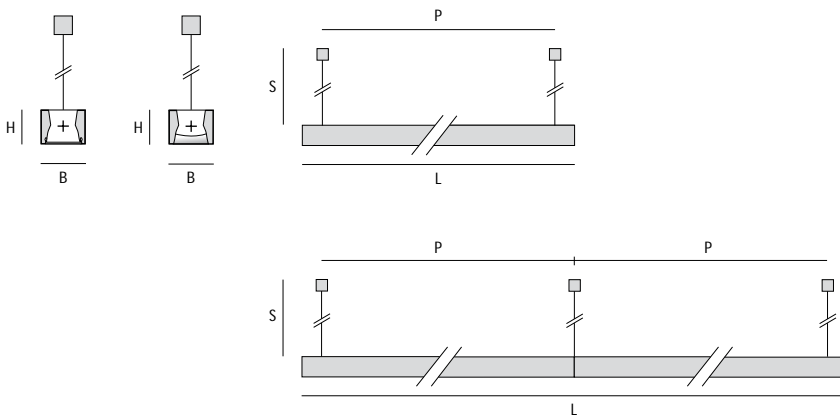

DATA 4803
T16 / T5
LOR 85%
Φ _u 36%
UGR < 16 / 16

DATA 4804
T16 / T5
LOR 87%
Φ _u 42%
UGR < 19 / 19



L: Length · B: Width · H: Height · P: Distance between suspension points · W: Weight · S: Suspension, 1500mm suspension can be cut on site