

SYSTEM 120

- PENDANT LUMINAIRE
- **m**-SYSTEM: CUSTOMER SPECIFIES LENGTH OF MODULE
- DIRECT AND DIRECT / INDIRECT
- HIGH GLOSS PARAVEX LOUVRE
- CIRCULAR EXTRUDED ALUMINIUM BODY
- END CAPS OF DIE-CAST ALUMINIUM
- SILVER FINISH

SYSTEM 120 PARAVEX DIRECT

SYSTEM 120 PARAVEX DIRECT / INDIRECT







SYSTEM 120 PARAVEX DIRECT

	SILVER	Ø	L	P	W	DATA
1 x 80 / 54 / 39W	SX 36251-974-3	120	var.	var.	5.2 kg/m	1151
2 x 35 / 28 / 21W	SX 36254-974-3	120	var.	var.	5.2 kg/m	1153



SYSTEM 120 PARAVEX DIRECT / INDIRECT

	SILVER	Ø	L	P	W	DATA
1 x 80 / 54 / 39W	SX 12351-974-3	120	var.	var.*	4.4 kg/m	1155

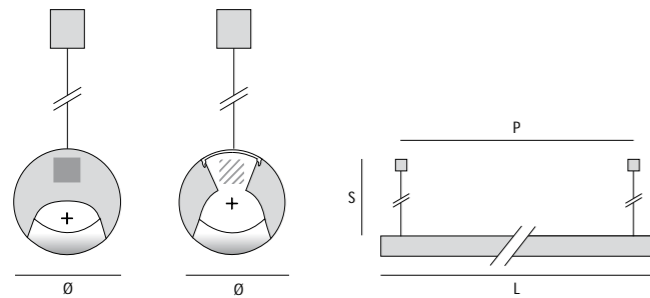

Ø: Diameter · L: Length · P: Distance between suspension points · W: Weight
 Dimmable versions for SYSTEM 120 DIRECT: .../04 = 1-10V · .../05 = DSI · .../06 = DALI · .../08 = CLT – see page 230
 For **m**-system end caps and suspensions have to be ordered separately – see page 064
 * Suspension not possible at the upper aperture (length of lamp – 325mm at both sides)

SYSTEM 120

- PENDANT LUMINAIRE
- **m**-SYSTEM: CUSTOMER SPECIFIES LENGTH OF MODULE
- DIRECT
- SATIN DIFFUSER
- MICROPRISMATIC MULTILAYER DIFFUSER
- CIRCULAR EXTRUDED ALUMINIUM BODY
- END CAPS OF DIE-CAST ALUMINIUM
- SILVER FINISH

SYSTEM 120 SATINÉ

SYSTEM 120 MICROPRISMS




SYSTEM 120 SATINÉ

	SILVER	Ø	L	P	W	DATA
1 x 80 / 54 / 39W	SX 36251-975-3	120	var.	var.	5.2 kg/m	1157
1 x 35 / 28 / 21W	SX 36253-975-3	120	var.	var.	5.2 kg/m	1157
2 x 35 / 28 / 21W	SX 36254-975-3	120	var.	var.	5.2 kg/m	1158




SYSTEM 120 MICROPRISMS

	SILVER	Ø	L	P	W	DATA
1 x 80 / 54 / 39W	SX 36251-972-3	120	var.	var.	5.2 kg/m	1161
1 x 35 / 28 / 21W	SX 36253-972-3	120	var.	var.	5.2 kg/m	1161
2 x 35 / 28 / 21W	SX 36254-972-3	120	var.	var.	5.2 kg/m	1162

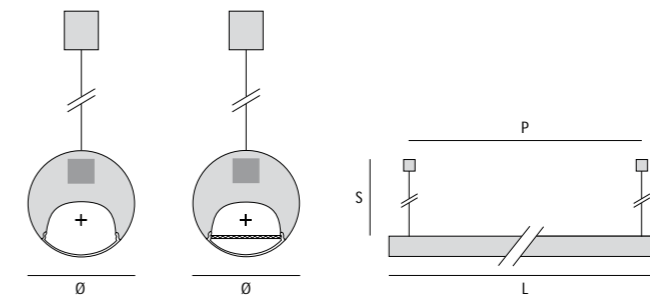


Ø: Diameter · L: Length · P: Distance between suspension points · W: Weight
 Dimmable versions: .../04 = 1-10V · .../05 = DSI · .../06 = DALI · Photometrics on request
 For **m**-system end caps and suspensions have to be ordered separately – see page 064




SYSTEM 120 SYSTEM PARTS

END CAP

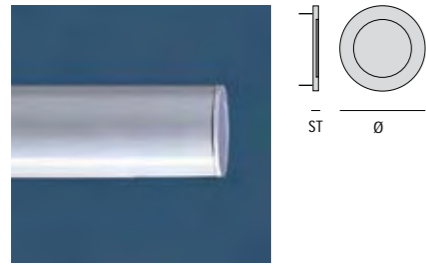


SILVER	ST	Ø
SX 124-000-3	4	120

WALL BRACKET

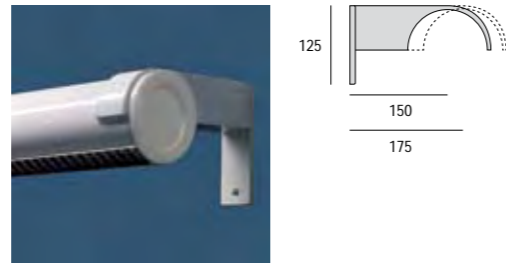


SILVER	
SX 99-104-3	with cableway

WALL ATTACHMENT

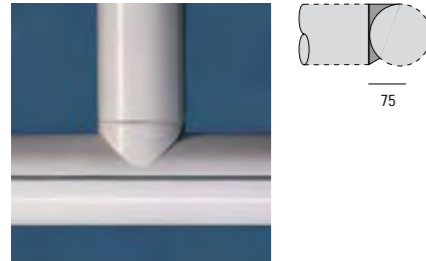


SILVER
SX 99-072-3

SHORT CORNER

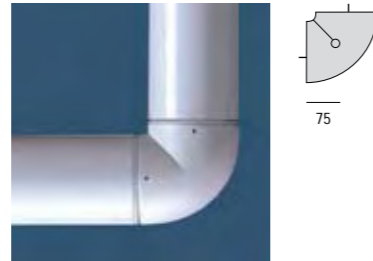


SILVER
SX 99-145-3

INTERMEDIATE COUPLER

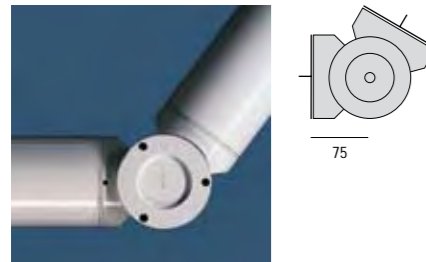


SILVER	
SX 99-148-3	adjustable 90°–270°

WIRE SUSPENSION

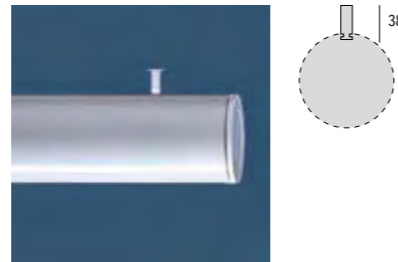


SILVER
SX 99-930-3

PENDANT ROD

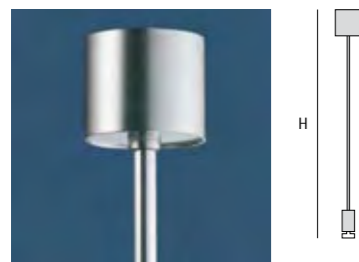

SILVER	Ø	H*
SX 99-820-3	10mm	600
SX 99-821-3	10mm	1200
SX 99-822-3	13mm	600
SX 99-823-3	13mm	1200

WIRE SUSPENSION

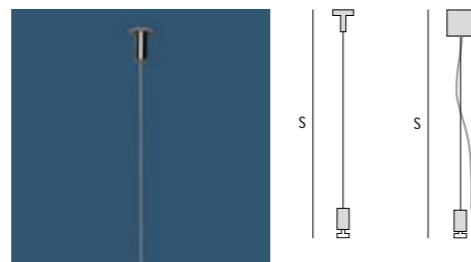

SILVER		S*
SX 99-830-3	Wire suspension	1500
SX 99-831-3		3000
SX 99-824-3	with 3 core supply cable (3 x 0.75²)	1500
SX 99-825-3		3000
SX 99-826-3	with 5 core supply cable (5 x 1.5²)	1500
SX 99-827-3		3000

ST: Thickness · Ø: Diameter · H: Pendant rod length · S: Wire suspension length
* can be cut on site

