






TIME OUTDOOR 70

Apparecchio su palo in acciaio inox con diffusore in policarbonato ad emissione laterale.

Appliance on stainless steel pole with polycarbonate diffuser and lateral light emission.

Gerät auf Pfahl aus Edelstahl mit Diffusor aus Polycarbonat für seitliche Lichtabgabe.

Luminaria sobre columna de acero inoxidable con difusor de policarbonato de emisión lateral.

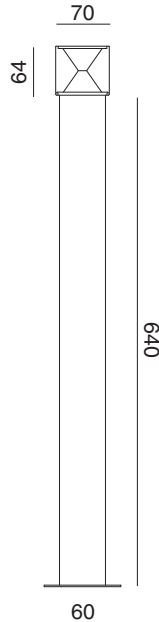

Apparecchi a terra
Floor appliances
Geräte für den Bodenbereich
Luminarias pisables



TIME OUTDOOR 70

7

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida
4,9W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación
700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas
50.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso
BI 300 lm
W 250 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color
BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección
IP67

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio
- 40° C + 50° C


Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento
III

Emissione
Emission
Emission
Emisión
Laterale
Lateral
Seitlich
Lateral

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles
A4A2-7 max 4
Apparecchi
Appliances
Geräte
Luminarias
A4A2-9 max 5
Apparecchi
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles
A4A2-D25 max 5
Apparecchi
Appliances
Geräte
Luminarias
A4A11-JP DMX max 28
Apparecchi
Appliances
Geräte
Luminarias

Installazione
Installation
Installation
Instalación



Finitura
Finishing
Ausführung
Acabado



I
Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



BI
Bianco
White
Weiss
Blanco



W
Warm
Warm
Warm
Warm




TIME OUTDOOR 90

Apparecchio su palo in acciaio inox con diffusore in policarbonato ad emissione laterale.

Appliance on stainless steel pole with polycarbonate diffuser and lateral light emission.

Gerät auf Pfahl aus Edelstahl mit Diffusor aus Polycarbonat für seitliche Lichtabgabe.

Luminaria sobre columna de acero inoxidable con difusor de policarbonato de emisión lateral.

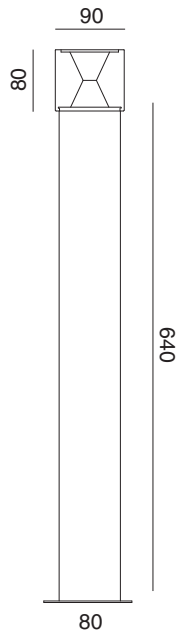

Apparecchi a terra
Floor appliances
Geräte für den Bodenbereich
Luminarias pisables



TIME OUTDOOR 90

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

8,4W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas

30.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

BI 540 lm
W 450 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color

BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP67

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Emissione
Emission
Emission
Emisión

Laterale
Lateral
Seitlich
Lateral

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A2-7 max 2
Apparecchi
Appliances
Geräte
Luminarias


A4A2-9 max 3
Apparecchi
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles

A4A2-D25 max 2
Apparecchi
Appliances
Geräte
Luminarias

A4A11-JP DMX max 16
Apparecchi
Appliances
Geräte
Luminarias

Installazione
Installation
Installation
Instalación



Finitura
Finishing
Ausführung
Acabado



I
Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



BI
Bianco
White
Weiss
Blanco



W
Warm
Warm
Warm
Warm

7