

Cassaforma stagna PVC

PVC sealed housing
Dichtes Gehäuse aus PVC
Contracaja estanca de PVC

A4CFC70T

pag 490




Cassaforma aperta PVC


Open PVC housing
Offenes Gehäuse aus PVC
Contracaja abierta de PVC

A4CF70T


pag 490




L08

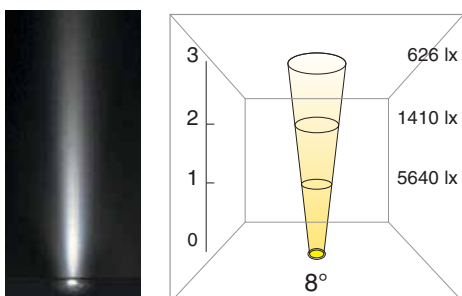

L20

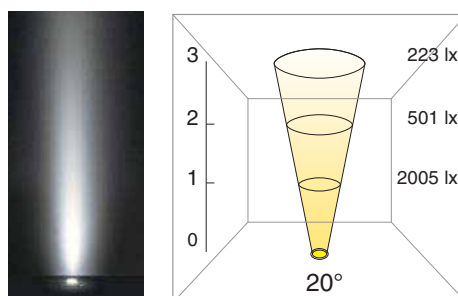

L45

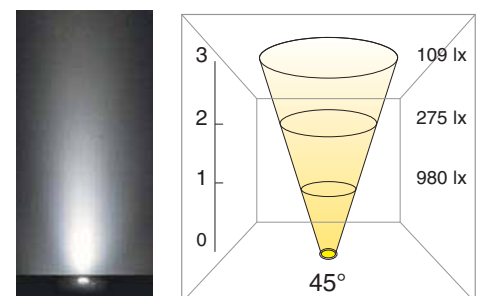

A4 R33 TYRE

Apparecchio carrabile IP68 in acciaio inox, con vetro temperato trasparente e guarnizione in silicone, sorgente luminosa a LED 3x3W.

Drive over IP68 stainless steel appliance with transparent tempered glass and silicon gasket, luminous source with 3x3W LED.

Befahrbares Gerät aus Edelstahl IP68, mit durchsichtigem temperiertem Glas und Silikondichtung, Leuchtquelle mit 3x3W LEDs.

Luminaria resistente al tráfico rodado de acero inoxidable IP68, con vidrio templado transparente y junta de silicona, fuente de luz de LED 3x3W.

Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED



A4 R33 TYRE

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

8,4W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas

50.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

BI 540 lm
W 450 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color

BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP68

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Angolo di emissione
Emission angle
Emissionswinkel
Angulo de emisión

L08 8°
L20 20°
L45 45°

Resistenza all'urto
Shock resistance
Stoßfestigkeit
Resistencia al impacto

IK10
carrabile
suitable for vehicles
befahrbar
para tráfico rodado

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A2-7 max 2 **Apparecchi**
Appliances
Geräte
Luminarias

A4A2-9 max 3 **Apparecchi**
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles

A4A2-D25 max 2 **Apparecchi**
Appliances
Geräte
Luminarias

A4A11-JP DMX max 16 **Apparecchi**
Appliances
Geräte
Luminarias

Finitura
Finishing
Ausführung
Acabado



I
Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



BI
Bianco
White
Weiss
Blanco



W
Warm
Warm
Warm
Warm