

Cassaforma PMMA

PMMA housing
Gehäuse aus PMMA
Contra caja de PMMA

A4CF40

pag 232



CE F IP65 35 mm



Lente piana trasparente


Transparent flat lens
Transparente flache Linse
Lente plana transparente

LPT

Lente piana sabbiata

Sanded flat lens
Sandgestrahlte flache Linse
Lente plana enarenada

LPS

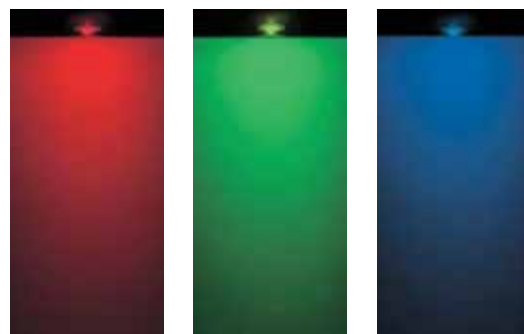

A4 E24 RGB

Apparecchio fisso quadrato 3W con molle.

Square fixed spot 3W with springs.

Unbewegliche quadratische Spot 3W mit Federungen.

Foco fijo cuadrado 3W con muelles.



Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED

3



A4 E24 RGB

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

R 1W
G 1,3W
B 1,3W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

350 mA
costante
constant
konstant
constant

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

80.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

R 30 lm
G 50 lm
B 14 lm

Lunghezza d'onda
Wave length
Wellenlänge
Longitud de onda

R 630 nm
G 525 nm
B 470 nm

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP65

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Angolo di emissione
Emission angle
Emissionswinkel
Ángulo de emisión

LPT/LPS 110°

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A11-EJ

max 8

Apparecchi

Appliances

Geräte

Luminarias

A4A11-J50

DMX max 6

Apparecchi

Appliances

Geräte

Luminarias

A4A11-JP

DMX max 12

Apparecchi

Appliances

Geräte

Luminarias

Finitura

Finishing
Ausführung
Acabado



N

Nichel opaco
Matt nickel
Nickel matt
Níquel opaco



I

Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



RGB