

Staffa

Bracket
Klammer
Soporte

A4ST40

pag 233

Cassaforma PMMA

PMMA housing
Gehäuse aus PMMA
Contracaja de PMMA

A4CF40

pag 232



CE F IP65 35 mm



Lente convessa trasparente

Transparent convex lens
Transparente konvexe Linse
Lente convexe transparente

LCT

Lente piana trasparente

Transparent flat lens
Transparente flache Linse
Lente plana trasparente

LPT

Lente convessa sabbiata



Sanded convex lens
Sandgestrahlte konvexe Linse
Lente convexe enarenada

LCS

Lente piana sabbiata

Sanded flat lens
Sandgestrahlte flache Linse
Lente plana enarenada

LPS

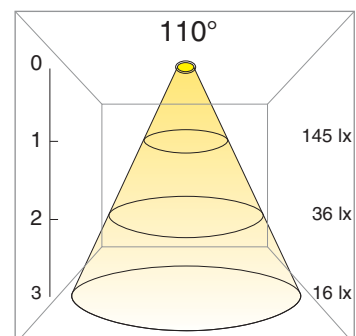

A4 E3

Apparecchio fisso tondo 3W con molle, disponibile con lente piana o convessa.

Round fixed spot 3W with springs, available with flat or convex lens.

Unbewegliche runde Spot 3W mit Federungen, erhältlich mit flacher oder konvexer Linse.

Foco fijo redondo 3W con muelles, disponible con lente plana o convexa.



Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED

3

A4 E3



Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

2,8W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas

80.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

BI 192 lm
W 144 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color

BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP65

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Angolo di emissione
Emission angle
Emissionswinkel
Ángulo de emisión

LCT/LCS 60°
LPT/LPS 110°

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A2-7 max 7
Apparecchi
Appliances
Geräte
Luminarias

A4A2-9 max 9
Apparecchi
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles

A4A2-D25 max 8
Apparecchi
Appliances
Geräte
Luminarias

A4A11-JP DMX max 48
Apparecchi
Appliances
Geräte
Luminarias

Finitura
Finishing
Ausführung
Acabado



N Nichel opaco
Matt nickel
Nickel matt
Níquel opaco

C Cromo
Chrome
Chrom
Cromo

I Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



BI Bianco
White
Weiss
Blanco

W Warm
Warm
Warm
Warm

BL Blu
Blue
Blau
Azul