

**Staffa**

Bracket  
Klammer  
Soporte

A4ST40

pag 233

**Cassaforma PMMA**

PMMA housing  
Gehäuse aus PMMA  
Contracaja de PMMA

A4CF40

pag 232



CE F IP65 35 mm



**Lente convessa trasparente**

Transparent convex lens  
Transparente konvexe Linse  
Lente convexe transparente

LCT

**Lente piana trasparente**

Transparent flat lens  
Transparente flache Linse  
Lente plana transparente

LPT

**Lente convessa sabbiata**



Sanded convex lens  
Sandgestrahlte konvexe Linse  
Lente convexe enarenada

LCS

**Lente piana sabbiata**

Sanded flat lens  
Sandgestrahlte flache Linse  
Lente plana enarenada

LPS

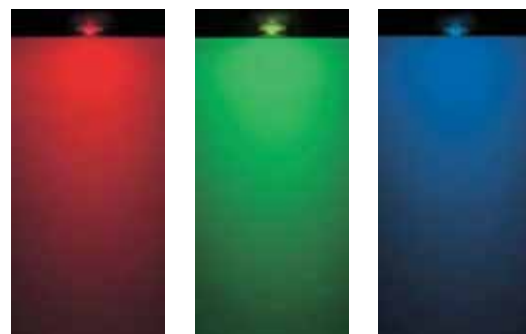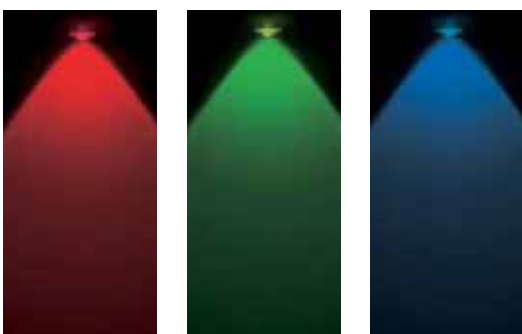

# A4 E3 RGB

Apparecchio fisso tondo 3W con molle.  
 Round fixed spot 3W with springs.  
 Unbewegliche runde Spot 3W mit Federungen.  
 Foco fijo redondo 3W con muelles.



**Apparecchi ad incasso a LED**  
 LED recessed appliances  
 Einbaugeräte mit LED  
 Luminarias para empotrar de LED

3



# A4 E3 RGB

**Potenza assorbita**  
 Absorbed power  
 Leistungsaufnahme  
 Potencia absorbida

**R** 1W  
**G** 1,3W  
**B** 1,3W

**Corrente di alimentazione**  
 Supply current  
 Stromspannung  
 Corriente de alimentación

**350 mA**  
 costante  
 constant  
 konstant  
 constant

**Vita media / ore**  
 Average life / hours  
 Lebensdauer / Stunden  
 Vida media / horas

**80.000**

**Flusso luminoso**  
 Luminous flux  
 Lichtstrom  
 Flujo luminoso

**R** 30 lm  
**G** 50 lm  
**B** 14 lm

**Lunghezza d'onda**  
 Wave length  
 Wellenlänge  
 Longitud de onda

**R** 630 nm  
**G** 525 nm  
**B** 470 nm

**Grado di protezione**  
 Protection degree  
 Schutzgrad  
 Grado de protección

**IP65**

**Temperatura di esercizio**  
 Operating temperature  
 Betriebstemperatur  
 Temperatura de ejercicio

**- 40° C + 50° C**

**Classe di isolamento**  
 Insulation class  
 Schutzklasse  
 Clase de aislamiento

**III**

**Angolo di emissione**  
 Emission angle  
 Emissionswinkel  
 Ángulo de emisión

**LCT/LCS** 60°  
**LPT/LPS** 110°

**Alimentatori disponibili**  
 Available power supplies  
 Erhältliche Vorschaltgeräte  
 Alimentadores disponibles

**A4A11-EJ**

max 8

**Apparecchi**  
 Appliances  
 Geräte  
 Luminarias

**A4A11-J50**

DMX max 6

**Apparecchi**  
 Appliances  
 Geräte  
 Luminarias

**A4A11-JP**

DMX max 12

**Apparecchi**  
 Appliances  
 Geräte  
 Luminarias

**Finitura**  
 Finishing  
 Ausführung  
 Acabado



**N**  
 Nichel opaco  
 Matt nickel  
 Nickel matt  
 Níquel opaco



**C**  
 Cromo  
 Chrome  
 Chrom  
 Cromo



**I**  
 Acciaio inox  
 Stainless steel  
 Edelstahl  
 Acero inoxidable

**Colori LED**  
 LED colours  
 LED Farben  
 Colores LED



**RGB**