


CE IP40 160 mm



A4 P3 AD

Apparecchio tondo orientabile 6x3W.
Adjustable round spot 6x3W.
Bewegliche runde Spot 6x3W.
Foco redondo orientable 6x3W.

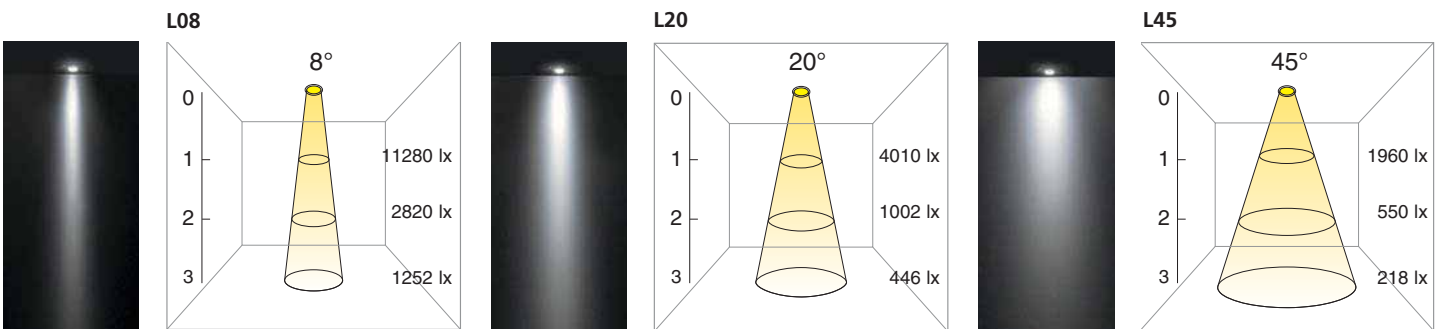

Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED

3



A4 P3 AD

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida
16,8W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación
700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas
30.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso
BI 1080 lm
W 864 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color
BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección
IP40

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio
- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento
III

Angolo di emissione
Emission angle
Emissionswinkel
Ángulo de emisión
L08 8°
L20 20°
L45 45°

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles
A4A2-7 max 1
Apparecchi
Appliances
Geräte
Luminarias
A4A2-9 max 1
Apparecchi
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles
A4A2-D25 max 1
Apparecchi
Appliances
Geräte
Luminarias
A4A11-JP DMX max 8
Apparecchi
Appliances
Geräte
Luminarias

Finitura
Finishing
Ausführung
Acabado



A
Alluminio
Aluminium
Aluminium
Aluminio
BO
Bianco
White
Weiss
Blanco

Colori LED
LED colours
LED Farben
Colores LED



BI
Bianco
White
Weiss
Blanco
W
Warm
Warm
Warm
Warm