


CE IP40 130 mm

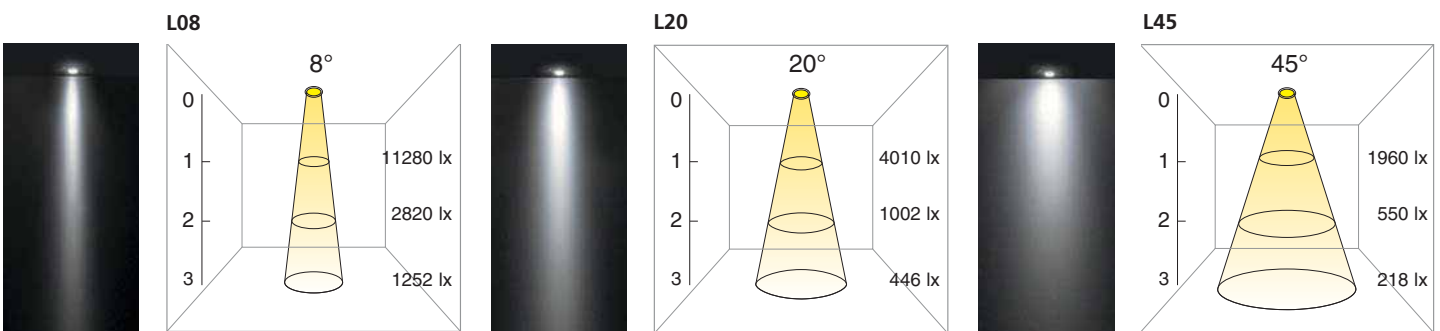

A4 P3 FX

Apparecchio fisso tondo 6x3W.

Round fixed spot 6x3W.

Unbewegliche runde Spot 6x3W.

Foco fijo redondo 6x3W.



Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED

3



A4 P3 FX

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

16,8W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

700 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas

30.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

BI 1080 lm
W 864 lm

Temperatura di colore
Colour temperature
Farbetemperatur
Temperatura de color

BI 5.500 K
W 3.000 K

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP40

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Angolo di emissione
Emission angle
Emissionswinkel
Ángulo de emisión

L08 8°
L20 20°
L45 45°

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A2-7 max 1
Apparecchi
Appliances
Geräte
Luminarias

A4A2-9 max 1
Apparecchi
Appliances
Geräte
Luminarias

Dimmer disponibili
Available dimmers
Erhältliche Dimmer
Dimmer disponibles

A4A2-D25 max 1
Apparecchi
Appliances
Geräte
Luminarias

A4A11-JP DMX max 8
Apparecchi
Appliances
Geräte
Luminarias

Finitura
Finishing
Ausführung
Acabado



A
Alluminio
Aluminium
Aluminium
Aluminio



BO
Bianco
White
Weiss
Blanco

Colori LED
LED colours
LED Farben
Colores LED



BI
Bianco
White
Weiss
Blanco



W
Warm
Warm
Warm
Warm