

**Cassaforma PMMA**

PMMA housing  
Gehäuse aus PMMA  
Contraçaja de PMMA

**A4CF47**

pag 490



CE F IP68



**Lente convessa trasparente**

Transparent convex lens  
Transparente konvexe Linse  
Lente convexe transparente

**LCT**

**Lente convessa sabbziata**

Sanded convex lens  
Sandgestrahlte konvexe Linse  
Lente convexe enarenada

**LCS**

**Lente piana trasparente**



Transparent flat lens  
Transparente flache Linse  
Lente plana trasparente

**LPT**

**Lente piana sabbziata**

Sanded flat lens  
Sandgestrahlte flache Linse  
Lente plana enarenada

**LPS**

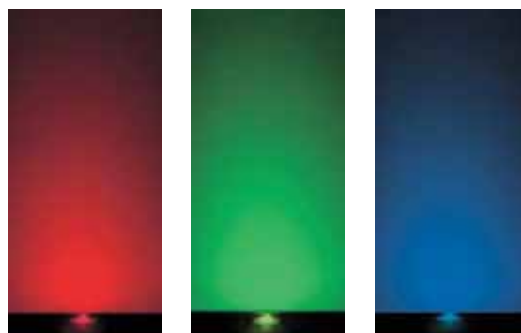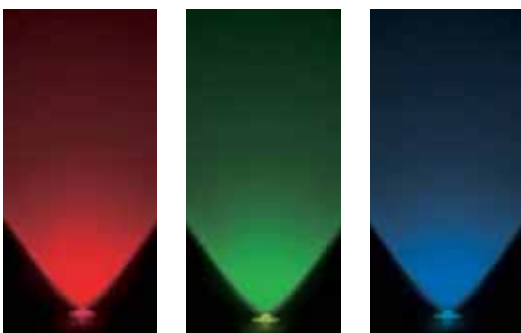

# A4 R16 RGB

Apparecchio fisso tondo 7W RGB con guarnizione.

Round fixed spot 7W RGB with gasket.

Unbewegliche runde Spot 7W RGB mit Dichtung.

Foco fijo redondo 7W RGB con junta.



**Apparecchi ad incasso a LED**  
LED recessed appliances  
Einbaugeräte mit LED  
Luminarias para empotrar de LED



## A4 R16 RGB

**Potenza assorbita**  
Absorbed power  
Leistungsaufnahme  
Potencia absorbida

**R** 1,6 W  
**G** 2,4 W  
**B** 2,4 W

**Corrente di alimentazione**  
Supply current  
Stromspannung  
Corriente de alimentación

**350 mA**  
costante  
constant  
konstant  
constant

**Vita media / ore**  
Average life / hours  
Lebensdauer / Stunden  
Vida media / horas

**50.000**

**Flusso luminoso**  
Luminous flux  
Lichtstrom  
Flujo luminoso

**R** 69 lm  
**G** 109 lm  
**B** 29 lm

**Lunghezza d'onda**  
Wave length  
Wellenlänge  
Longitud de onda

**R** 630 nm  
**G** 525 nm  
**B** 470 nm

**Grado di protezione**  
Protection degree  
Schutzgrad  
Grado de protección

**IP68**

**Temperatura di esercizio**  
Operating temperature  
Betriebstemperatur  
Temperatura de ejercicio

**- 40° C + 50° C**

**Classe di isolamento**  
Insulation class  
Schutzklasse  
Clase de aislamiento

**III**

**Angolo di emissione**  
Emission angle  
Emissionswinkel  
Ángulo de emisión

**LCT/LCS** 60°  
**LPT/LPS** 110°

**Resistenza all'urto**  
Shock resistance  
Stoßfestigkeit  
Resistencia al impacto

**IK10**  
calpestabile  
applicable on pedestrian areas  
begehbar  
de suelo pisable

**Alimentatori disponibili**  
Available power supplies  
Erhältliche Vorschaltgeräte  
Alimentadores disponibles

**A4A11-EJ**  
max 3  
**Apparecchi**  
Appliances  
Geräte  
Luminarias

**A4A11-J50**  
DMX max 2  
**Apparecchi**  
Appliances  
Geräte  
Luminarias

**A4A11-JP**  
DMX max 5  
**Apparecchi**  
Appliances  
Geräte  
Luminarias

**Finitura**  
Finishing  
Ausführung  
Acabado



**I**  
Acciaio inox  
Stainless steel  
Edelstahl  
Acero inoxidable

**Colori LED**  
LED colours  
LED Farben  
Colores LED



**RGB**