

Cassaforma PMMA

PMMA housing
Gehäuse aus PMMA
Contracaja de PMMA

A4CF35

pag 490



CE F IP68



Lente convessa trasparente

Transparent convex lens
Transparente konvexe Linse
Lente convexe transparente

LCT

Lente piana trasparente

Transparent flat lens
Transparente flache Linse
Lente plana transparente

LPT

Lente convessa sabbiata



Sanded convex lens
Sandgestrahlte konvexe Linse
Lente convexe enarenada

LCS

Lente piana sabbiata

Sanded flat lens
Sandgestrahlte flache Linse
Lente plana enarenada

LPS

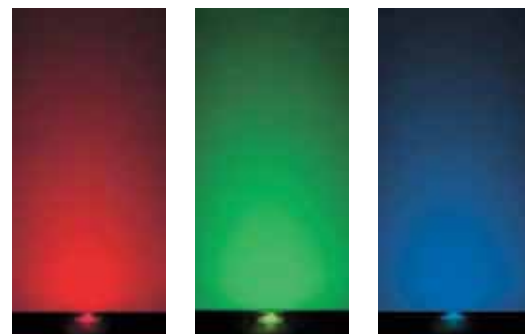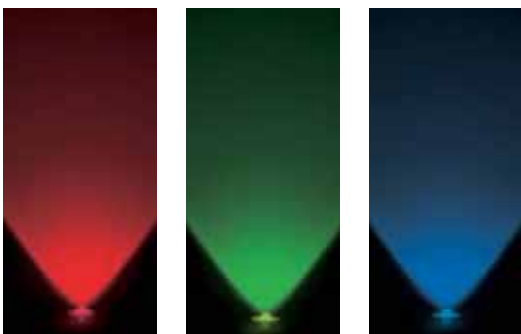

A4 R3 RGB

Apparecchio fisso tondo LED 3W RGB con guarnizione, disponibile con lente piana o convessa.

Round 3W RGB fixed spot with gasket, available with flat or convex lens.

Unbewegliche runde Spot 3W RGB mit Dichtung. Erhältlich mit flacher oder konvexer Linse.

Foco fijo redondo 3W RGB con junta, disponible con lente plana o convexe.



Apparecchi ad incasso a LED
LED recessed appliances
Einbaugeräte mit LED
Luminarias para empotrar de LED



A4 R3 RGB

Potenza assorbita
Absorbed power
Leistungsaufnahme
Potencia absorbida

R 1 W
G 1,3 W
B 1,3 W

Corrente di alimentazione
Supply current
Stromspannung
Corriente de alimentación

350 mA
costante
constant
konstant
constant

Vita media / ore
Average life / hours
Lebensdauer / Stunden
Vida media / horas

80.000

Flusso luminoso
Luminous flux
Lichtstrom
Flujo luminoso

R 30 lm
G 50 lm
B 14 lm

Lunghezza d'onda
Wave length
Wellenlänge
Longitud de onda

R 630 nm
G 525 nm
B 470 nm

Grado di protezione
Protection degree
Schutzgrad
Grado de protección

IP68

Temperatura di esercizio
Operating temperature
Betriebstemperatur
Temperatura de ejercicio

- 40° C + 50° C

Classe di isolamento
Insulation class
Schutzklasse
Clase de aislamiento

III

Angolo di emissione
Emission angle
Emissionswinkel
Angulo de emisión

LCT/LCS 60°
LPT/LPS 110°

Resistenza all'urto
Shock resistance
Stoßfestigkeit
Resistencia al impacto

IK10
calpestabile
applicable on pedestrian areas
begehbar
de suelo pisable

Alimentatori disponibili
Available power supplies
Erhältliche Vorschaltgeräte
Alimentadores disponibles

A4A11-EJ
max 8
Apparecchi
Appliances
Geräte
Luminarias

A4A11-J50
DMX max 6
Apparecchi
Appliances
Geräte
Luminarias

A4A11-JP
DMX max 12
Apparecchi
Appliances
Geräte
Luminarias

Finitura
Finishing
Ausführung
Acabado



I
Acciaio inox
Stainless steel
Edelstahl
Acero inoxidable

Colori LED
LED colours
LED Farben
Colores LED



RGB