


You search: [APPLICATIONS](#) > [DRIVEOVER & WALKOVER](#) > [FLEX-S](#)

FLEX-S

⚡ Classe I ⚡ Classe III




PRINT



- Die-cast aluminium body.
- Tempered glass diffuser 10mm. For model with inox ring (Aisi 304) the glass tempered diffuser is 12mm.
- Bright aluminium reflector pure at 99,85%.
- Closing socket head screws in stainless steel.
- Painted with polyester powders with an high oxidation corrosion resistance and before treatment of chromating.
- Silicone rubber gasket.
- Single brass cable-blocker.
- Nylon junction box with fibre glass.

[ACCESSORIES >>](#)

FLEX-S IP 66 - 67				
	GZ10	1x50W	FLEX-S PAR16	
	G9	1x60W	FLEX-S HAPIN60	
	E27	1x50W	FLEX-S PAR20	
	GY6,35	1x50W	FLEX-S 12V	⚡
	GU5,3	1x50W	FLEX-S DECO50	⚡
	9 LED	1W	FLEX-S LED	
	9 LED	1W	FLEX-S LED T	
	3 LED	4,5W	FLEX-S LED3	⚡
	3 LED	4,5W	FLEX-S LED3 T	
STANDARD COLOURS <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>				

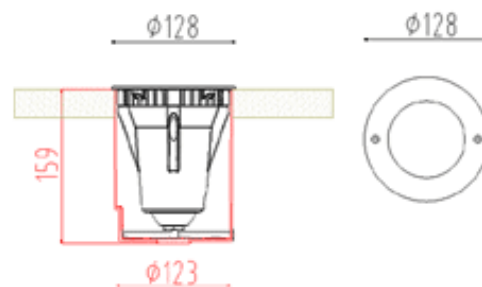

* [click lamps](#) for item's details

[PREVIOUS PAGE](#)



PRINT

[SEARCH AGAIN](#)

FRANCESCONI & C.
LUMINAZIONE



hosted & powered by [iww s.r.l.](#) © 2005 all right reserved