

You search: [APPLICATIONS](#) > [WALL & CEILING](#) > [2086-3](#)

2086/3



Classe I



Classe II




PRINT



- Polycarbonate body V1 self-extinguishing and U.V. rays stabilized.
- Incandescent wire 850°C.
- Aluminium reflector.
- Rubber cable entry.
- Polycarbonate bracket V1 self-extinguishing and U.V. rays stabilized inclined at 45°.

2086-3 IP 44							
	E27	60W	2086-3				
	E27	60W	2086-3 C2				
	G23	9W	2086-4				
	G23	9W	2086-5				
STANDARD COLOURS					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

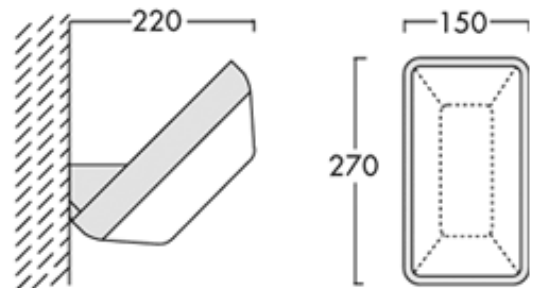

* [click lamps](#) for item's details

[PREVIOUS PAGE](#)



PRINT

[SEARCH AGAIN](#)

