


## LASER Exterior Euro Twin

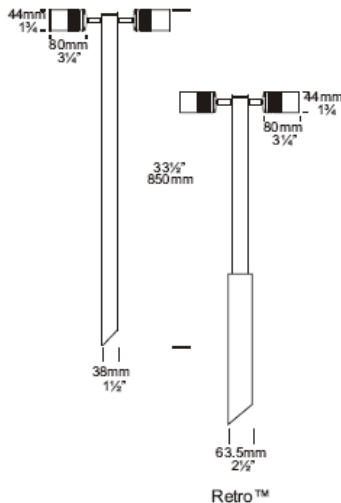

The Euro Twin Pole Lite is for situations where the luminaire needs to be discreet, the smaller sized MR11 lamp is utilised to achieve this. Each spotlight can be aimed in any direction. This luminaire has fully adjustable arms allowing 360 degree rotation and 0 - 90° elevation with a built in glare guard. The Euro Twin Pole Lite is ideal for path lighting as well as tree lighting, or the heads may be aimed downward to eliminate vertical light.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

### Ordering Information

Luminaire Type	Material	Accessories
ETPL - Euro Twin Pole Lite	Cop - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSEURF - Frost Lens /R - Retro™ Transformer 110/240-12 volt For an alternative LED option start at page 10.4

Ordering Example: ETPL COP - Euro Twin Pole Lite in Copper

ETPL/R SS - Euro Twin Pole Lite Retro™  
in 316 Stainless Steel

(Accessories ordered separately)

#### Luminaire Construction

CNC machined from one of the following metals:

##### Copper:

**Body** 45.4mm (1 3/4") rod.

**Pole** 38mm (1 1/2") x 850mm (33 3/4") tube.

##### 316 Stainless Steel:

**Body** 45.4mm (1 3/4") rod.

**Pole** 38mm (1 1/2") x 850mm (33 3/4") tube.

##### Retro™:

**Pole** 38mm (1 1/2") x 410mm (16") tube.

**Transformer Pole** 63.5mm (2 1/2") x 440mm (17 1/2").

#### Mounting

Pole 800mm (31 1/2") directly mounted into the earth. Retro™ - set in concrete.

#### Features

##### Lens:

7mm (1/4") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

##### Life Time Warranty.

##### Gaskets:

Silicone, iron impregnated 220°C (428°F).

##### Lamp Holders:

GU4 - 350°C (662°F) ceramic multi contact lamp holders with 250°C (480°F) teflon cables.

##### Accessories:

Cable Joint Kit (Cat. CJK150).  
Not approved for USA /Canada.  
Frosted Lens (Cat. LENSEURF).  
Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

##### Swivels:

Copper fixtures 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel fixtures 360° rotation and 0 - 90° elevation, full stainless steel construction.