


LASER Exterior Twin Pole

The Twin Pole Lite is ideal for path lighting as well as tree lighting, or the heads may be aimed downward to eliminate vertical light. The fixture has two individual spotlights which can be aimed in two entirely different directions. Each lite has fully adjustable arms allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer this changes the luminaire to an IP56 rating.

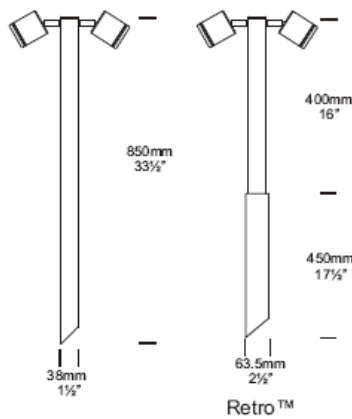

Ordering Information

Luminaire Type

TPL - Twin Pole Lite

Material/Finish

BK - Black
BZ - Bronze
GN - Green
STAR - Silver Star
WH - White
COP - Copper
SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
LENSSTEPF - Frost Lens
GG - Glare Guard
HCL - Hex Cell Louvre Adaptor
/R - Retro™ Transformer
110/240-12 volt
For an alternative LED option start at page 10.4

Ordering Example: TPL SS - Twin Pole Lite in 316 Stainless Steel

TPL/R COP - Twin Pole Lite Retro™ in Copper

HCL - Hex Cell Louvre Adaptor
(Accessories ordered separately)

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, White, Bronze, Green, Silver Star.

Copper: 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

316 Stainless Steel: 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

Poles: Aluminium, Copper, 316 Stainless 38mm (1 1/2") x 850mm (33 1/2") tube.

Retro™ Pole: 38mm (1 1/2") x 410mm (16") tube.

Transformer Pole: 63.5mm (2 1/2") x 440mm (17 1/2").

Mounting

Pole 850mm (33 1/2") directly mounted into the earth. Retro™ - set in concrete.

Features

Lens:
7mm (1/4") clear flush fit shatter resistant glass. Life Time Warranty.

Gaskets:
Silicone, iron impregnated 220°C (428°F).

Lamp Holders:
GU 5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:
Cable Joint Kit (Cat. CJK150)
Not approved for USA /Canada.
Frosted Lens (Cat. LENSSTEPF).
Glare Guard (Cat. GG).
Hex Cell Louvre Adaptor (Cat. HCL).
Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

Swivels:
Aluminium and Copper luminaires 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.