



LASER Exterior Floor Lite Square

Floor Lite Square



Cat. No. FLSQ
Cat. No. FLSQFL

The Floor Lite Square has a 88mm x 88mm (3½" x 3½") flange and has a low profile of 7mm. The square shape makes it ideal for mounting in tiled areas and it can be walked upon without being damaged. There are five flange designs: Clover, Grill, Louvre (45 degree angle), Spot, Cross and is supplied with a mounting canister.

A 110/240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

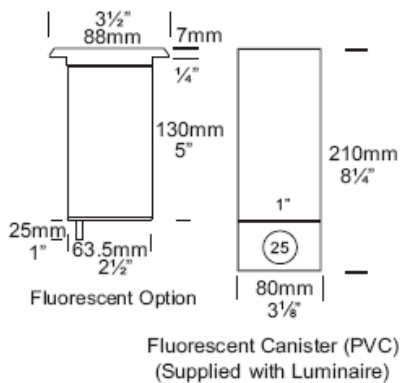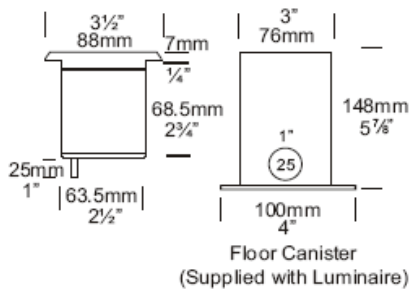

Ordering Information

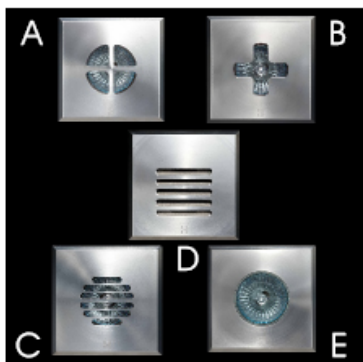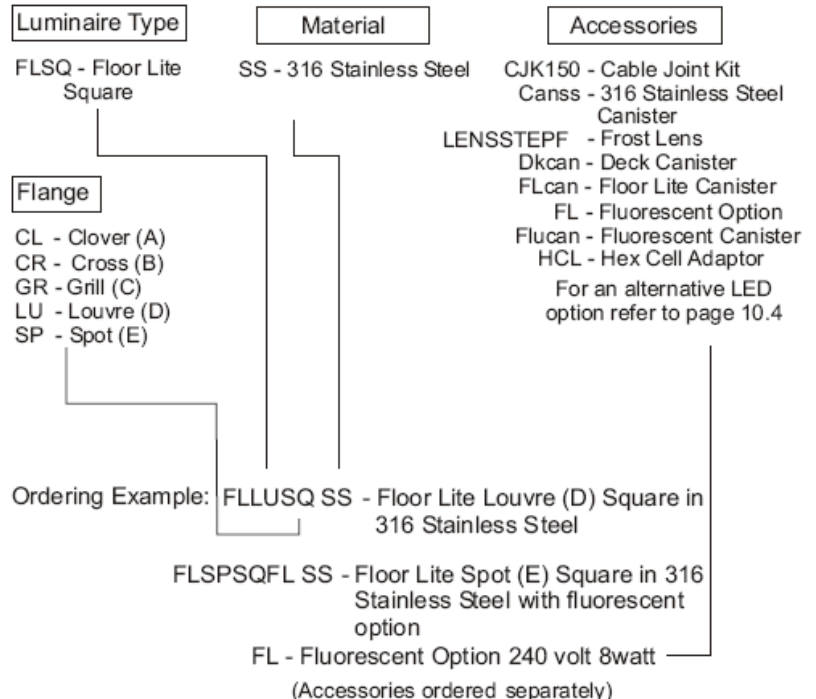

Luminaire Construction	Features
<p>CNC machined from:</p> <p>Body: 316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.</p> <p>Flange: 90mm x 90mm (3½" x 3½") solid 316 stainless steel bar.</p> <p>Mounting The luminaire is pushed into the canister and is held by two silicone "O" rings; Canss, FLcan, Flucan are cast into concrete, brick, concrete block, etc. Dkcan: Mounted into wooden decks, wooden frames, etc.</p>	<p>Lens: 3mm (1/8") clear tempered shatter resistant glass. Life Time Warranty.</p> <p>Gasket: Silicone, iron impregnated 220°C (428°F).</p> <p>Lamp Holders: GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.</p> <p>Fluorescent: E27 PET 210°C (410°F) base mount. E26 available in the USA.</p> <p>Accessories: Cable Joint Kit (Cat. CJK150) Not approved for USA/Canada. Deck Canister (Cat. Dkcan). Frosted Lens (Cat. LENSSTEPF). Floor Canister (Cat. FLcan). Fluorescent Canister PVC (Cat. Flucan). Fluorescent Option 8watt 240 volt (Cat. FL) Ip66. (Note: Not for USA/Canada). Hex Cell Louvre Adaptor (Cat. HCL) (Note: Supplied as standard for USA/Canada). 316 Stainless Canister for use in lime stone etc. (Cat. Canss).</p>