


LASER Exterior NPS Spot

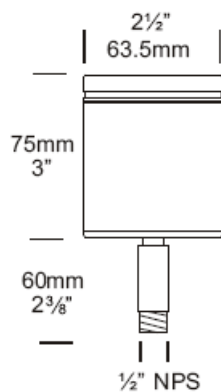

The NPS Spot is ideal for illuminating bushes and trees from ground level. The luminaire has been designed with a threaded 1/2" NPS base which can be easily fixed to a Hunza™ Super Spike ground stake, Hunza™ Tree Mount Kit or any 1/2" NPS fitting. It has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation.

The luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

Ordering Information

Luminaire Type	Material/Finish	Accessories
NPS - NPS Spot	BK - Black BZ - Bronze GN - Green STAR - Silver Star COP - Copper SS - 316 Stainless Steel	GG - Glare Guard HCL - Hex Cell Louvre Adaptor LENSSTEPF - Frosted Lens SSP/G - Hunza™ Super Spike SSP/T - Hunza™ Tree Mount Adaptor For an alternative LED option start at page 10.4

Ordering Example: NPS BK - NPS Spot in Black

HCL COP - Hex Cell Louvre Adaptor in Copper
(Accessories ordered separately)

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star.

Copper 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

316 Stainless Steel 63.5mm (2 1/2") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

Mounting

Designed with a 1/2" NPS thread, this luminaire is easily fitted to a Hunza™ Super Spike or Hunza™ Tree Mount Adaptor. It also fits any 1/2" NPS threaded fitting.

Features

Lens:

10mm (3/8") clear flush fit shatter resistant glass. Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Frosted Lens (Cat. LENSSTEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).

Hunza™ Super Spike (Cat. SSP/G).

Hunza™ Tree Mount Adaptor (Cat. SSP/T).

Swivel:

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.