

## LASER Exterior Spike Adjustable




The Spike Spot Adjustable has been designed for easy installation into the earth and is ideal for illuminating a bush, tree or any landscape feature. The fully adjustable head allows 360 degree rotation and 0 - 90 degree elevation. This luminaire uses a MR16 GU 5.3 lamp.

This luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

### Ordering Information

Luminaire Type	Material/Finish	Accessories
SS/A - Spike Spot Adjustable	BK - Black BZ - Bronze GN - Green STAR - Silver Star COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frosted Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor /300 - Ground Spike 300mm (12") For an alternative LED option start at page 10.4
<p>Ordering Example SS/A COP - Spike Spot Adjustable in Copper</p> <p>GG BK - Glare Guard in Black (Accessories ordered separately)</p>		

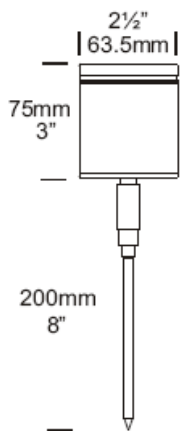

### Luminaire Construction

CNC machined from one of the following metals:  
 High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.  
 End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat  
**Colours** Black, Bronze, Green, Silver Star.  
**Copper** 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.  
**316 Stainless Steel** 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

### Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

### Features

**Lens:**  
 10mm (3/8") clear flush fit shatter resistant glass.  
**Life Time Warranty**  
**Gasket:**  
 Silicone, iron impregnated 220°C (428°F)  
**Lamp Holder:**  
 GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.  
**Accessories:**  
 Cable Joint Kit (Cat. CJK150)  
 Not approved for USA /Canada.  
 Frosted Lens (Cat. LENSSTEPF).  
 Glare Guard (Cat. GG).  
 Hex Cell Louvre Adaptor (Cat. HCL).  
 300mm (12") Spike (Cat. /300).  
**Swivel:**  
 Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.  
 Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.