

LASER Exterior Wall Spot



The Wall Spot has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building. This luminaire has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation.

This luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.


Ordering Information

Luminaire Type	Material/Finish	Accessories
WS - Wall Spot	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frosted Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor /R - Retro™ Transformer 110/240-12 volt WBAP - Wall Box Adaptor Plate For an alternative LED option start at page 10.4

Wall Spot

Cat. No. WS

Cat. No. WS/R

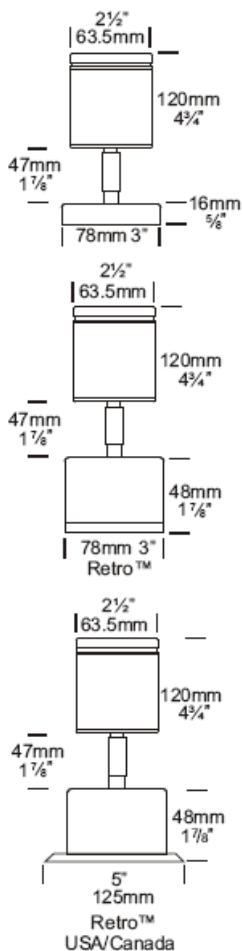

Ordering Example: WS BK - Wall Spot in Black
 WS/R SS - Wall Spot Retro™ in 316 Stainless Steel

LENSSTEPF - Frosted Lens
 (Accessories ordered separately)

Luminaire Construction	Features
<p>CNC machined from the following metals: Body: High corrosion resistant low copper 63.5mm (2 1/2") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2 1/2") rod. Base & Mounting Plate (Retro™): Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White. Body: Copper 63.5mm (2 1/2") x 10mm (25/64"). End cap - solid copper 63.5mm (2 1/2") rod. Base: Copper Hand spun 2mm (5/64"). Mounting Plate: Forged brass (Retro™). Body: 316 Stainless Steel 63.5mm (2 1/2") x 10mm (25/64"). End cap - 316 stainless steel 63.5mm (2 1/2") rod. Base: Investment cast and CNC machined. Mounting Plate: Investment cast and CNC machined (Retro™).</p>	<p>Lens: 10mm (3/8") clear flush fit tempered shatter resistant glass. Life Time Warranty. Gasket: Silicone, iron impregnated 220°C (428°F). Lamp Holder: GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables. Accessories: Cable Joint Kit (Cat CJK150). Not approved for USA/Canada. Frosted Lens (Cat. LENSSTEPF). Glare Guard (Cat. GG). Hex Cell Louvre Adaptor (Cat. HCL). Retro™ transformer 110/240-12 volt (Cat. /R). Wall Box Adaptor Plate (Cat. WBAP 12 volt luminaire USA/Canada). Swivels: Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring. Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.</p>
<p>Mounting 12volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 Junction boxes for USA/Canada. Retro™ luminaire (110/240-12volt): a mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.</p>	