

## LASER Exterior Euro Wall Spot



### Euro Wall Spot

Cat. No. EWS  
Cat. No. EWS/R

The Euro Wall Spot is for situations where the luminaire needs to be discreet, the smaller sized MR11 lamp is utilised to achieve this. The spotlight can be aimed in any direction. This luminaire has a fully adjustable arm allowing 360 degree rotation and 0 - 90° elevation with a built in glare guard. The Euro Wall Spot has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building.


The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

#### Ordering Information

Luminaire Type	Material	Accessories
EWS - Euro Wall Spot	Cop - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSEURF - Frost Lens /R - Retro™ Transformer 110/240-12 volt WBAP - Wall Box Adaptor Plate (12 volt Luminaire) For an alternative LED option start at page 10.4

Ordering Example: EWS SS - Euro Twin Wall Spot in 316 Stainless Steel  
EWS/R COP - Euro Twin Wall Spot Retro™ in Copper

CJK150 - Cable Joint Kit  
(Accessories ordered separately)

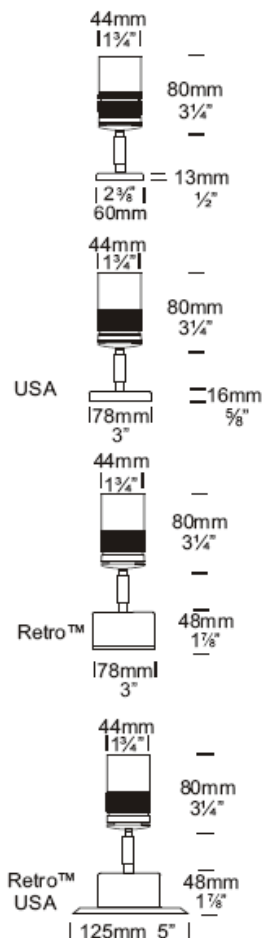

Luminaire Construction
CNC machined from one of the following metals: <b>Body:</b> Copper 45.4mm (1 3/4") rod. <b>Base:</b> Copper hand spun 2mm (3/16") <b>Body:</b> 316 Stainless steel 45.4mm (1 3/4") rod. <b>Base:</b> Investment cast and CNC machined.
Mounting
12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction box for USA/Canada. Retro™ luminaire (110/240-12 volt): a mounting plate is fixed to the wall using two screws and then the luminaire is fitted to the mounting plate.

Features
<b>Lens:</b> 7mm (1/4") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control. Life Time Warranty.
<b>Gaskets:</b> Silicone, iron impregnated 220°C (428°F).
<b>Lamp Holder:</b> GU4 - 350°C (662°F) ceramic multi contact lamp holder with 180°C (356°F) silicone cables.
<b>Accessories:</b> Cable Joint Kit (Cat. CJK150) Not approved for USA/Canada. Frost Lens (Cat. LENSEURF). Retro™ transformer 110/240-12 volt (Cat. /R). Wall Box Adaptor Plate for 12 volt luminaires (Cat. WBAP).
<b>Swivel:</b> Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring. Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.