

## DL 4080 Compact


Lampada fluorescente compatta  
Compact fluorescent Lamp

	599.4080.1.45.00.1	TC-D	G24-d2	1 x 18 W BI/WH
	599.4080.1.45.00.2	TC-D	G24-d2	1 x 18 W NE/BK
	599.4080.1.45.00.3	TC-D	G24-d2	1 x 18 W GI/GR
	599.4080.1.45.00.4	TC-D	G24-d2	1 x 18 W AN/AN
	599.4080.1.45.00.0	TC-D	G24-d2	1 x 18 W AR/SI


## DL 4081 Compact

Lampada fluorescente compatta  
Compact fluorescent Lamp


	599.4081.1.45.00.1	TC-D	G24-d2	1 x 18 W	BI/WH
	599.4081.1.45.00.2	TC-D	G24-d2	1 x 18 W	NE/BK
	599.4081.1.45.00.3	TC-D	G24-d2	1 x 18 W	GI/GR
	599.4081.1.45.00.4	TC-D	G24-d2	1 x 18 W	AN/AN
	599.4081.1.45.00.0	TC-D	G24-d2	1 x 18 W	AR/SI

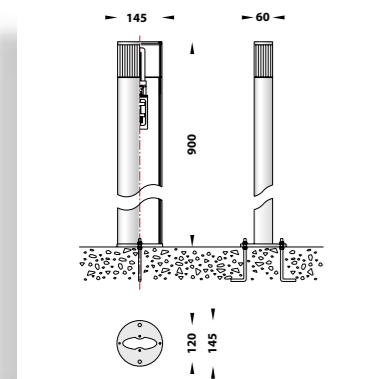

599.9034.A.00.00.Z  
Base di ancoraggio  
Anchor bolt kit




TC-D G24d-2 18W

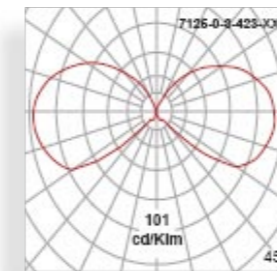

TC-D G24d-2 18W



599.9034.A.00.00.Z  
Base di ancoraggio  
Anchor bolt kit

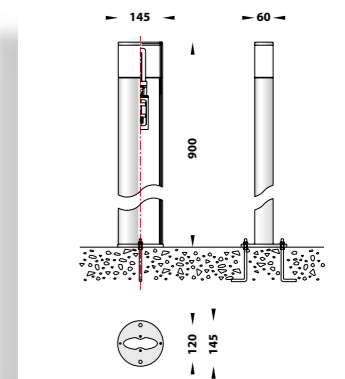

CORPO IN ALLUMINIO ESTRUSO S6063  
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI  
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV  
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE  
VITERIA IN ACCIAIO INOX  
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063  
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY  
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE  
STAINLESS STEEL SCREWS  
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C

CORPO IN ALLUMINIO ESTRUSO S6063  
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI  
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV  
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE  
VITERIA IN ACCIAIO INOX  
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063  
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY  
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE  
STAINLESS STEEL SCREWS  
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C