





## DL 4076 Display

Lampada alogenuri metallici  
Metal halide lamp

	599.4076.1.85.00.1	HIT-CE	G12	1 x 35 W BI/WH
	599.4076.1.85.00.2	HIT-CE	G12	1 x 35 W NE/BK
	599.4076.1.85.00.3	HIT-CE	G12	1 x 35 W GI/GR
	599.4076.1.85.00.4	HIT-CE	G12	1 x 35 W AN/AN
	599.4076.1.85.00.0	HIT-CE	G12	1 x 35 W AR/SI


## DL 4076 Display

Lampada fluorescente compatta  
Compact fluorescent Lamp

	599.4076.1.45.00.1	TC-D	G24-d2	1 x 18 W BI/WH
	599.4076.1.45.00.2	TC-D	G24-d2	1 x 18 W NE/BK
	599.4076.1.45.00.3	TC-D	G24-d2	1 x 18 W GI/GR
	599.4076.1.45.00.4	TC-D	G24-d2	1 x 18 W AN/AN
	599.4076.1.45.00.0	TC-D	G24-d2	1 x 18 W AR/SI


## DL 4076 Display

Lampada fluorescente compatta  
Compact fluorescent Lamp

	599.4076.1.46.00.1	TC-D	G24-d3	1 x 26 W BI/WH
	599.4076.1.46.00.2	TC-D	G24-d3	1 x 26 W NE/BK
	599.4076.1.46.00.3	TC-D	G24-d3	1 x 26 W GI/GR
	599.4076.1.46.00.4	TC-D	G24-d3	1 x 26 W AN/AN
	599.4076.1.46.00.0	TC-D	G24-d3	1 x 26 W AR/SI


## DL 4076 Display


Lampada fluorescente compatta elettronica  
Electronic fluorescent lamp

	599.4076.1.53.00.1	TC-TSE	E27	1 x 15 W BI/WH
	599.4076.1.53.00.2	TC-TSE	E27	1 x 15 W NE/BK
	599.4076.1.53.00.3	TC-TSE	E27	1 x 15 W GI/GR
	599.4076.1.53.00.4	TC-TSE	E27	1 x 15 W AN/AN
	599.4076.1.53.00.0	TC-TSE	E27	1 x 15 W AR/SI


## DL 4076 Display

Lampada alogena  
Halogen Lamp


	599.4076.1.23.00.1	QT32	E27	1 x 60 W BI/WH
	599.4076.1.23.00.2	QT32	E27	1 x 60 W NE/BK
	599.4076.1.23.00.3	QT32	E27	1 x 60 W GI/GR
	599.4076.1.23.00.4	QT32	E27	1 x 60 W AN/AN
	599.4076.1.23.00.0	QT32	E27	1 x 60 W AR/SI

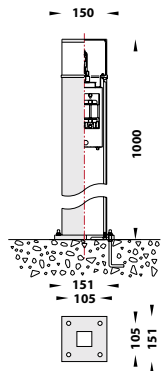

599.9033.A.00.00.Z  
Base di ancoraggio  
Anchor bolt kit



HIT-CE G12 35W



TC-D G24d-2 18W



CORPO IN ALLUMINIO ESTRUSO S6063  
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI  
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV  
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE  
VITERIA IN ACCIAIO INOX  
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063  
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE  
STAINLESS STEEL SCREWS  
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C

