



DL 4011 Dlink

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4011.1.46.00.1	TC-D	G24-d3	1 x 26 W	BI/WH
	599.4011.1.46.00.2	TC-D	G24-d3	1 x 26 W	NE/BK
	599.4011.1.46.00.3	TC-D	G24-d3	1 x 26 W	GI/GR
	599.4011.1.46.00.4	TC-D	G24-d3	1 x 26 W	AN/AN
	599.4011.1.46.00.0	TC-D	G24-d3	1 x 26 W	AR/SI

DL 4011 Dlink

Lampada fluorescente compatta elettronica
Electronic fluorescent lamp

	599.4011.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.4011.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.4011.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.4011.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.4011.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI




DL 4011 Dlink

Lampada alogena
Halogen Lamp


	599.4011.1.23.00.1	QT32	E27	1 x 60 W	BI/WH
	599.4011.1.23.00.2	QT32	E27	1 x 60 W	NE/BK
	599.4011.1.23.00.3	QT32	E27	1 x 60 W	GI/GR
	599.4011.1.23.00.4	QT32	E27	1 x 60 W	AN/AN
	599.4011.1.23.00.0	QT32	E27	1 x 60 W	AR/SI

599.9030.A.00.00.Z

Base di ancoraggio
Anchor bolt kit

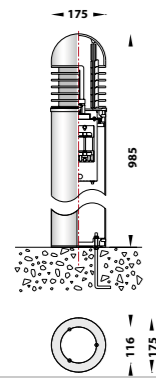

TC-D G24d-3 26W



TC-D G24d-3 26W



CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C



DL 4111 Dlink

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4111.1.46.00.1	TC-D	G24-d3	1 x 26 W	BI/WH
	599.4111.1.46.00.2	TC-D	G24-d3	1 x 26 W	NE/BK
	599.4111.1.46.00.3	TC-D	G24-d3	1 x 26 W	GI/GR
	599.4111.1.46.00.4	TC-D	G24-d3	1 x 26 W	AN/AN
	599.4111.1.46.00.0	TC-D	G24-d3	1 x 26 W	AR/SI

DL 4111 Dlink

Lampada fluorescente compatta elettronica
Electronic compact fluorescent Lamp

	599.4111.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.4111.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.4111.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.4111.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.4111.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI



DL 4111 Dlink

Lampada alogena
Halogen Lamp

	599.4111.1.23.00.1	QT32	E27	1 x 60 W	BI/WH
	599.4111.1.23.00.2	QT32	E27	1 x 60 W	NE/BK
	599.4111.1.23.00.3	QT32	E27	1 x 60 W	GI/GR
	599.4111.1.23.00.4	QT32	E27	1 x 60 W	AN/AN
	599.4111.1.23.00.0	QT32	E27	1 x 60 W	AR/SI



NEW

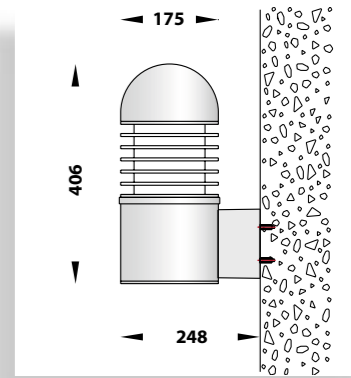

CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C



DL 4012 Dlink

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4012.1.46.00.1	TC-D	G24-d3	1 x 26 W	BI/WH
	599.4012.1.46.00.2	TC-D	G24-d3	1 x 26 W	NE/BK
	599.4012.1.46.00.3	TC-D	G24-d3	1 x 26 W	GI/GR
	599.4012.1.46.00.4	TC-D	G24-d3	1 x 26 W	AN/AN
	599.4012.1.46.00.0	TC-D	G24-d3	1 x 26 W	AR/SI

DL 4012 Dlink


Lampada fluorescente compatta elettronica
Electronic compact fluorescent Lamp

	599.4012.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.4012.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.4012.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.4012.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.4012.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI



DL 4012 Dlink

Lampada alogena
Halogen Lamp


	599.4012.1.22.00.1	QT32	E27	1 x 60 W	BI/WH
	599.4012.1.22.00.2	QT32	E27	1 x 60 W	NE/BK
	599.4012.1.22.00.3	QT32	E27	1 x 60 W	GI/GR
	599.4012.1.22.00.4	QT32	E27	1 x 60 W	AN/AN
	599.4012.1.22.00.0	QT32	E27	1 x 60 W	AR/SI



599.9030.A.00.00.Z

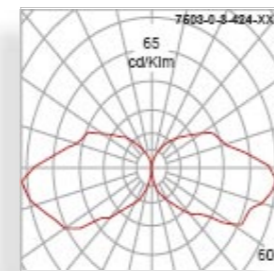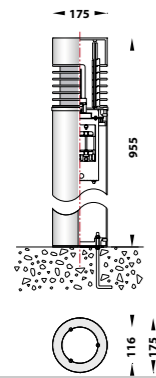Base di ancoraggio
Anchor bolt kit

TC-D G24d-3 26W



TC-D G24d-3 26W



CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A
POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED
ADDITIVE
RIFLETTORE IN ALLUMINIO PURISSIMO
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
HIGH PURITY ALUMINIUM REFLECTOR
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C

DL 4112 Dlink

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4112.1.46.00.1	TC-D	G24-d3	1 x 26 W	BI/WH
	599.4112.1.46.00.2	TC-D	G24-d3	1 x 26 W	NE/BK
	599.4112.1.46.00.3	TC-D	G24-d3	1 x 26 W	GI/GR
	599.4112.1.46.00.4	TC-D	G24-d3	1 x 26 W	AN/AN
	599.4112.1.46.00.0	TC-D	G24-d3	1 x 26 W	AR/SI

DL 4112 Dlink


Lampada fluorescente compatta elettronica
Electronic compact fluorescent Lamp

	599.4112.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.4112.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.4112.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.4112.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.4112.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI

DL 4112 Dlink

Lampada alogena
Halogen Lamp

	599.4112.1.24.00.1	QT32	E27	1 x 100 W	BI/WH
	599.4112.1.24.00.2	QT32	E27	1 x 100 W	NE/BK
	599.4112.1.24.00.3	QT32	E27	1 x 100 W	GI/GR
	599.4112.1.24.00.4	QT32	E27	1 x 100 W	AN/AN
	599.4112.1.24.00.0	QT32	E27	1 x 100 W	AR/SI

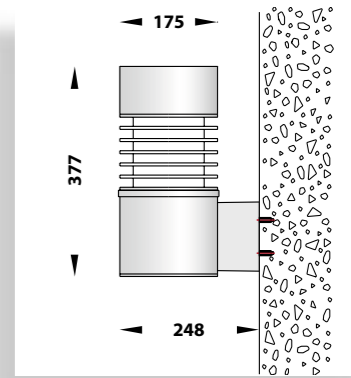

CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A
POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED
ADDITIVE
RIFLETTORE IN ALLUMINIO PURISSIMO
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
HIGH PURITY ALUMINIUM REFLECTOR
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C