



DL 4070 Frame

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4070.1.45.00.1	TC-D	G24-d2	1 x 18 W BI/WH
	599.4070.1.45.00.2	TC-D	G24-d2	1 x 18 W NE/BK
	599.4070.1.45.00.3	TC-D	G24-d2	1 x 18 W GI/GR
	599.4070.1.45.00.4	TC-D	G24-d2	1 x 18 W AN/AN
	599.4070.1.45.00.0	TC-D	G24-d2	1 x 18 W AR/SI

DL 4070 Frame

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4070.2.45.00.1	TC-D	G24-d2	2 x 18 W BI/WH
	599.4070.2.45.00.2	TC-D	G24-d2	2 x 18 W NE/BK
	599.4070.2.45.00.3	TC-D	G24-d2	2 x 18 W GI/GR
	599.4070.2.45.00.4	TC-D	G24-d2	2 x 18 W AN/AN
	599.4070.2.45.00.0	TC-D	G24-d2	2 x 18 W AR/SI

DL 4070 Frame

Lampada fluorescente compatta elettronica
Electronic compact fluorescent Lamp

	599.4070.1.54.00.1	TC-TSE	E27	1 x 23 W BI/WH
	599.4070.1.54.00.2	TC-TSE	E27	1 x 23 W NE/BK
	599.4070.1.54.00.3	TC-TSE	E27	1 x 23 W GI/GR
	599.4070.1.54.00.4	TC-TSE	E27	1 x 23 W AN/AN
	599.4070.1.54.00.0	TC-TSE	E27	1 x 23 W AR/SI

DL 4070 Frame

Lampada alogena
Halogen Lamp

	599.4070.1.23.00.1	QT32	E27	1 x 60 W BI/WH
	599.4070.1.23.00.2	QT32	E27	1 x 60 W NE/BK
	599.4070.1.23.00.3	QT32	E27	1 x 60 W GI/GR
	599.4070.1.23.00.4	QT32	E27	1 x 60 W AN/AN
	599.4070.1.23.00.0	QT32	E27	1 x 60 W AR/SI

DL 4071 Frame

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4071.1.45.00.1	TC-D	G24-d2	1 x 18 W	BI/WH
	599.4071.1.45.00.2	TC-D	G24-d2	1 x 18 W	NE/BK
	599.4071.1.45.00.3	TC-D	G24-d2	1 x 18 W	GI/GR
	599.4071.1.45.00.4	TC-D	G24-d2	1 x 18 W	AN/AN
	599.4071.1.45.00.0	TC-D	G24-d2	1 x 18 W	AR/SI

DL 4071 Frame

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.4071.2.45.00.1	TC-D	G24-d2	2 x 18 W	BI/WH
	599.4071.2.45.00.2	TC-D	G24-d2	2 x 18 W	NE/BK
	599.4071.2.45.00.3	TC-D	G24-d2	2 x 18 W	GI/GR
	599.4071.2.45.00.4	TC-D	G24-d2	2 x 18 W	AN/AN
	599.4071.2.45.00.0	TC-D	G24-d2	2 x 18 W	AR/SI

DL 4071 Frame

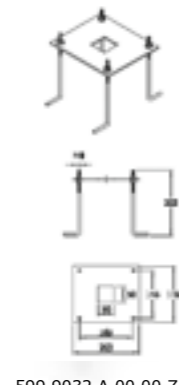
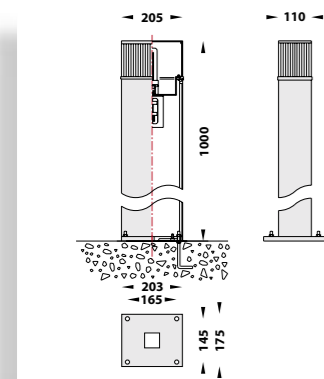

Lampada fluorescente compatta elettronica
Electronic compact fluorescent Lamp

	599.4071.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.4071.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.4071.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.4071.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.4071.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI


DL 4071 Frame

Lampada alogena
Halogen Lamp

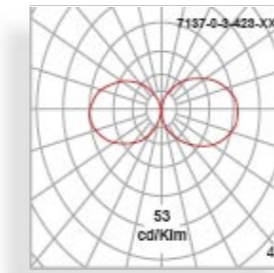
	599.4071.1.23.00.1	QT32	E27	1 x 60 W	BI/WH
	599.4071.1.23.00.2	QT32	E27	1 x 60 W	NE/BK
	599.4071.1.23.00.3	QT32	E27	1 x 60 W	GI/GR
	599.4071.1.23.00.4	QT32	E27	1 x 60 W	AN/AN
	599.4071.1.23.00.0	QT32	E27	1 x 60 W	AR/SI

599.9032.A.00.00.Z
Base di ancoraggio
Anchor bolt kit

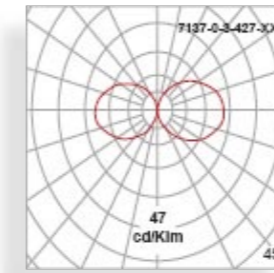
TC-D G24d-2 18W



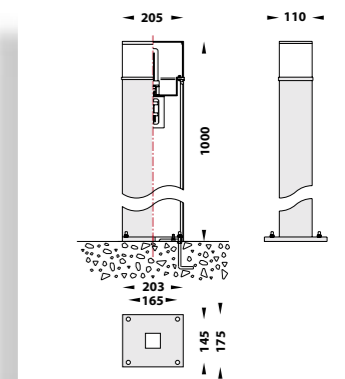
TC-D G24d-2 2x18W



TC-D G24d-2 18W



TC-D G24d-2 2x18W

599.9032.A.00.00.Z
Base di ancoraggio
Anchor bolt kit

CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C



CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C