

**DL 3700 Husky**Lampada alogena bassa tensione  
low voltage halogen Lamp

599.3700.1.27.00.1	QT9	G4	1 x 10 W	BI/WH
599.3700.1.27.00.2	QT9	G4	1 x 10 W	NE/BK
599.3700.1.27.00.3	QT9	G4	1 x 10 W	GI/GR
599.3700.1.27.00.4	QT9	G4	1 x 10 W	AN/AN
599.3700.1.27.00.0	QT9	G4	1 x 10 W	AR/SI

**DL 3700 Husky**Sorgente LED  
LED emitter

599.3700.1.L4.00.1	LED WHITE	1 x 1 W	BI/WH
599.3700.1.L4.00.2	LED WHITE	1 x 1 W	NE/BK
599.3700.1.L4.00.3	LED WHITE	1 x 1 W	GI/GR
599.3700.1.L4.00.4	LED WHITE	1 x 1 W	AN/AN
599.3700.1.L4.00.0	LED WHITE	1 x 1 W	AR/SI

**DL 3701 Husky**Lampada alogena bassa tensione  
low voltage halogen Lamp

599.3701.1.27.00.1	QT9	G4	1 x 10 W	BI/WH
599.3701.1.27.00.2	QT9	G4	1 x 10 W	NE/BK
599.3701.1.27.00.3	QT9	G4	1 x 10 W	GI/GR
599.3701.1.27.00.4	QT9	G4	1 x 10 W	AN/AN
599.3701.1.27.00.0	QT9	G4	1 x 10 W	AR/SI

**DL 3701 Husky**Sorgente LED  
LED emitter



599.3701.1.L4.00.1	LED WHITE	1 x 1 W	BI/WH
599.3701.1.L4.00.2	LED WHITE	1 x 1 W	NE/BK
599.3701.1.L4.00.3	LED WHITE	1 x 1 W	GI/GR
599.3701.1.L4.00.4	LED WHITE	1 x 1 W	AN/AN
599.3701.1.L4.00.0	LED WHITE	1 x 1 W	AR/SI

**DL 3702 Husky**Lampada alogena bassa tensione  
low voltage halogen Lamp

599.3702.1.27.00.1	QT9	G4	1 x 10 W	BI/WH
599.3702.1.27.00.2	QT9	G4	1 x 10 W	NE/BK
599.3702.1.27.00.3	QT9	G4	1 x 10 W	GI/GR
599.3702.1.27.00.4	QT9	G4	1 x 10 W	AN/AN
599.3702.1.27.00.0	QT9	G4	1 x 10 W	AR/SI


**DL 3702 Husky**Sorgente LED  
LED emitter

599.3702.1.L4.00.1	LED WHITE	1 x 1 W	BI/WH
599.3702.1.L4.00.2	LED WHITE	1 x 1 W	NE/BK
599.3702.1.L4.00.3	LED WHITE	1 x 1 W	GI/GR
599.3702.1.L4.00.4	LED WHITE	1 x 1 W	AN/AN
599.3702.1.L4.00.0	LED WHITE	1 x 1 W	AR/SI

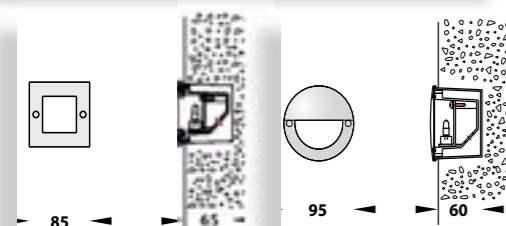

CORPO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI  
CASSAFORMA IN PA 6.6  
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV  
VITERIA IN ACCIAIO INOX  
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY  
POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE  
WALL INSTALLATION HOUSING IN POLYAMID PA 6.6  
SELF-EXTINGUISHING POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE  
STAINLESS STEEL SCREWS  
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C

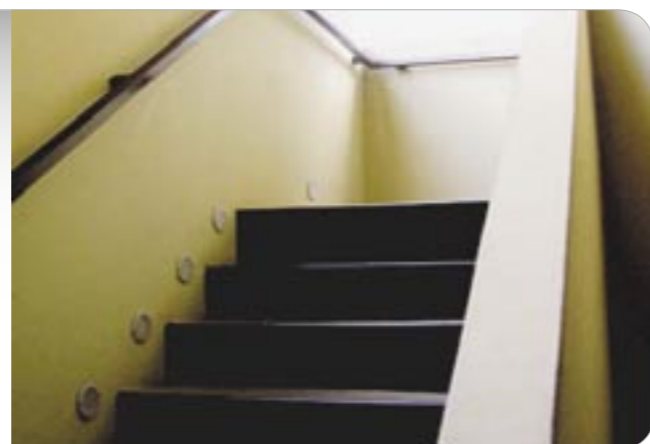


OPTION : vetro trasparente - clear glass  
vetro sabbiato - sandbasted glass


cod: 599.3700.A.00.00.1

cod: 599.3700.A.00.00.1


Scatola per installazione da  
incasso in poliammide inclusa  
Wall installation housing in  
polyamid included



ART 3700 QT9 G4 10W



ART 3701 QT9 G4 10W



ART 3702 QT9 G4 10W

